LRD20RD024P1

MICRO PLCS, BASE MODULE, AUXILIARY SUPPLY VOLTAGE 24VDC, 12/8 RELAY. BUILT-IN RS485



Product designation			Micro PLC - Base module with RS485 onboard
Product type designation			LRD20RD024P1
Auxiliary supply voltage			24VDC
Number of inputs		n°	8 digital + 4 digital/analog
Number of outputs		N°	8 relay
Max I/O number (base module + expansion modules)			20+24
Power supply			
Rated auxil. supply voltage			24VDC
Operating voltage range			20.4...28.8VDC
Avarage current consumption		mA	185
Power consumption Max		W	5
Digital inputs			
Number of digital input		n°	8 + 4 digital/analog
Rated voltage		V	24VDC
Input signals			
	State 0 (OFF)		<5VDC
	State 1 (ON)		>15VDC
Response time			
	0 to 1 (OFF-ON)		4ms (0.5ms for high speed)
	1 to 0 (ON-OFF)		4ms (0.3ms for high speed)
Analog inputs			
Number of analog input		n°	4 digital/analog
Analog input type			Voltage inputs
Inputs signal range		V	0...10
Resolution			0.01V
Bit of conversion		bit	8
Current consumption at			
	10VDC	mA	<0.17mA
Input impedance		kΩ	>40
Admissible overload		VDC	28
Sampling time		ms	5...20ms(LADDER) 2...10ms (FBD)
Maximum cable lenght		m / ft	≤30m/98ft (shielded wire)
Maximum cable lenght		m / ft	≤30m/98ft (shielded wire)
Digital outputs			
Number of digital output		n°	8
type			Relay
type			Relay
System resources			

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LRD20RD024P1

MICRO PLCS, BASE MODULE, AUXILIARY SUPPLY VOLTAGE 24VDC, 12/8 RELAY. BUILT-IN RS485

Display				LCD display, 4 lines x 16 characters
Display				LCD display, 4 lines x 16 characters
Communications				
Type of communication port				RS485, 2 wire
Connections				
Terminals type				Screw
Tightening torque for terminals				
		max	Nm	0.6
		Max	Ibft	0.4
Conductor section				
	AWG/Kcmil			
		min		26
		max		14
	IEC			
		min	mm²	0.14
		max	mm²	2.5
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-20
		max	°C	+55
	Storage temperature			
		min	°C	-40
		max	°C	+70
Relative humidity			%	20...90% without condensation
Housing				
Mounting				35mm DIN rail or screw fixing (M4x20mm)
Degree of protection				IP20
Dimensions (W x H x D)			mm	126 x 106 x 59.6
Weight			g	360
Dimensions				

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LRD20RD024P1

MICRO PLCS, BASE MODULE, AUXILIARY SUPPLY VOLTAGE 24VDC, 12/8 RELAY. BUILT-IN RS485

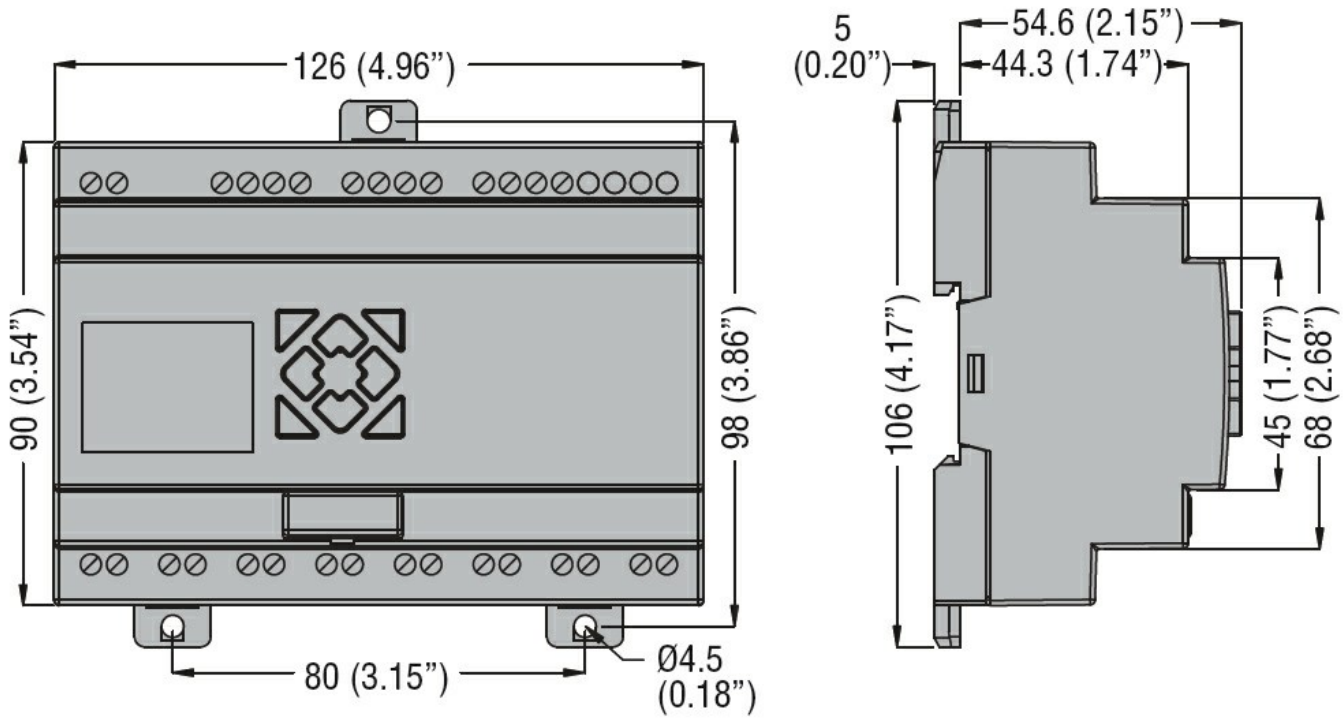

Wiring diagrams

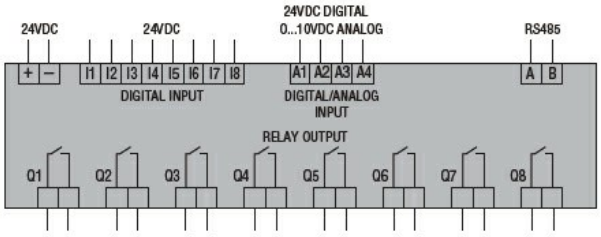

Certifications and compliance

Compliance

CSA C22.2 n° 142
IEC/EN 61131-2
UL508

Certificates

cULus
EAC

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding