SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24V LED+Z-Diode M16x1.5

Form A (18 mm)
24 V AC ±20% / DC ±25%
LED and Z-diode
metric

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product


Illustration


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk


MURR ELEKTRONIK
stay connected



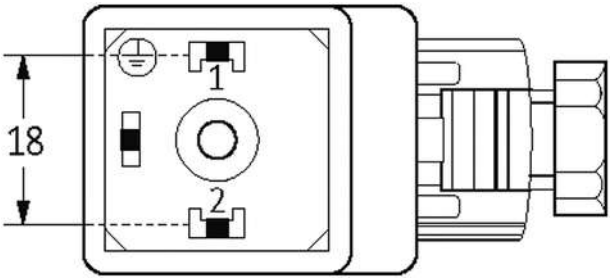

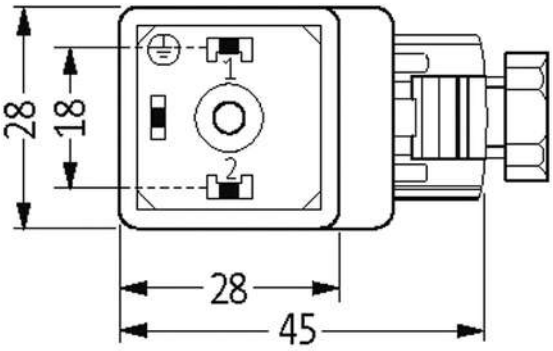

Height: 41 mm

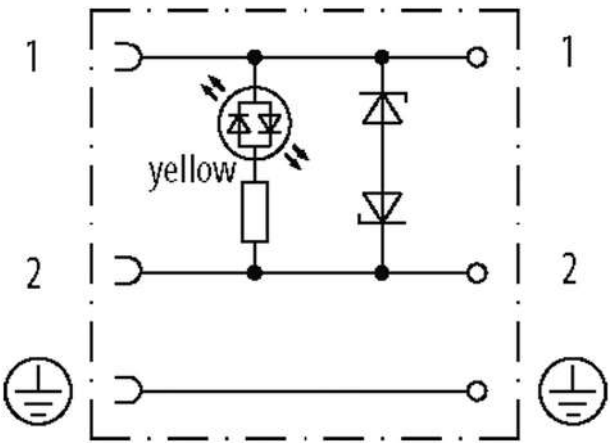

Product may differ from Image

Form

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

Form	29001

Technical Data	
Operating voltage	24 V AC/DC
Operating current per contact	max. 4 A
Configuration	2 contacts + PE
Locking of ports	M3 (recommended torque 0.4 Nm)
Protection	IP65 inserted and tightened (EN 60529)
Tightening torque (clamp screw)	0.1 Nm
Sealing range (cable Ø)	5...10 mm
General data	
Temperature range	-20...+60 °C
Commercial data	
country of origin	CN
customs tariff number	85366990
EAN	4048879187688
eClass	27279221
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20