
E33350

Universal process adapter

ADAPT UNI

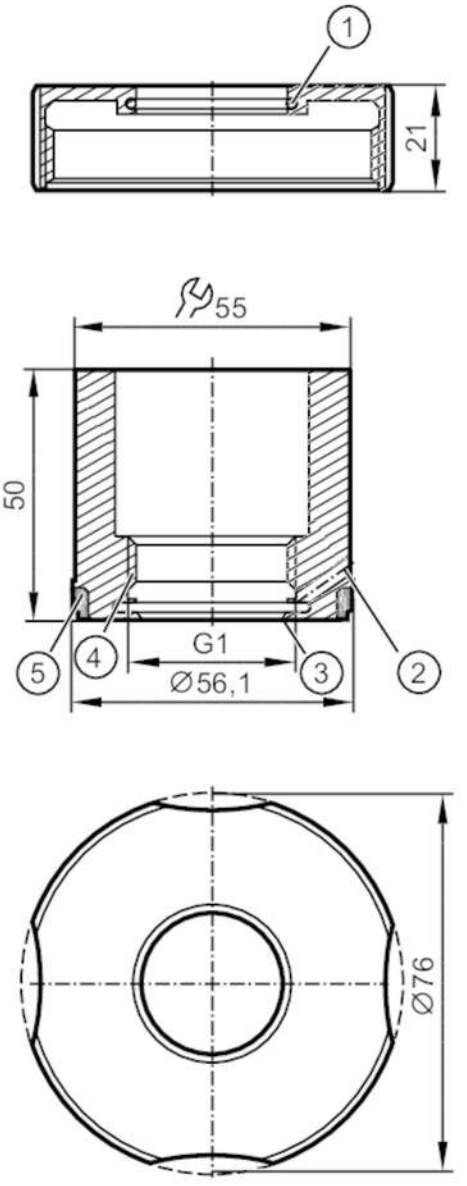

1 O-ring 30x2 FKM
2 Leakage port
3 sealing area
4 internal thread G1 Aseptoflex Vario
5 Gasket silicone

EC 1935/2004

Application		
Design		accessories for, PY200x, : (Anderson Weld-In Tank Shell: 71060A0003), PM17xx, : (Anderson Weld-In Tank Shell:71060A0004)
Pressure rating	[bar]	16

Tests / approvals	
Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.

E33350

Universal process adapter

ADAPT UNI

Pressure Equipment Directive EAC		The adapter is intended for use in devices, machines and installations that do not fall under the categories of the technical rule TR CU 032/2013.
Safety instructions		The compatibility between medium and product material has to be checked in all applications.
Mechanical data		
Weight	[g]	1019.3
Materials (wetted parts)		stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4
Sensor connection		G 1 Aseptoflex Vario
Process connection		universal process adapter Anderson Weld-In Tank Shell: 71060A0003; 71060A0004
Sealing		Gasket
Hygienic equipment class to DIN 11866		H4
Accessories		
Items supplied		O-ring: 24 x 2, EPDM, FDA compliant, E30054
		O-ring: 30 x 2, FKM
		Gasket, $silicone 3A and FDA compliant
Accessories (optional)		O-ring: 24 x 2, FKM, FDA compliant, E30123
		sealing ring, PEEK, FDA compliant, E30124
Remarks		
Pack quantity		1 pcs.