MURR ELEKTRONIK
stay connected

T-Coupler Slimline M12 male/ 2x M8 female A-cod.


4-pol. / 2x 3-pol.


T-coupler (Slim Line)
Male straight – females straight
M12 – M8, 4-pole
Distribution function (NO)
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



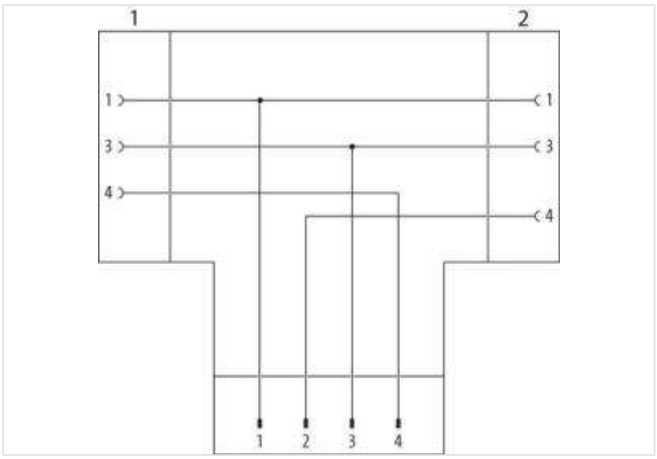

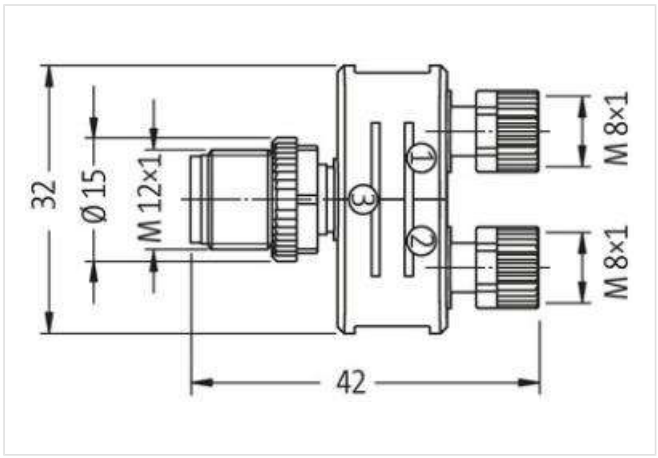

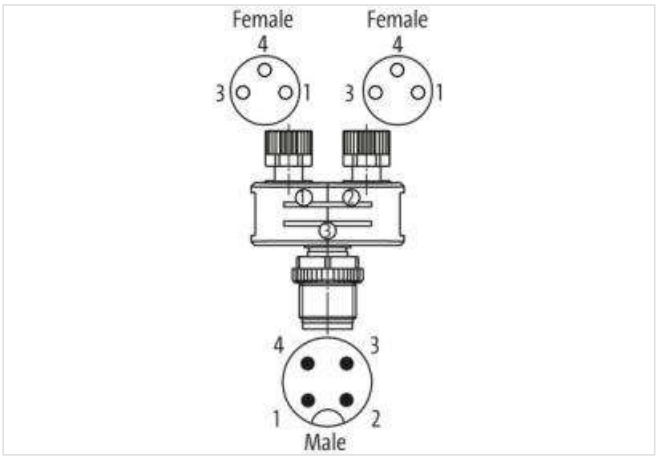

Product may differ from Image

c UL us LISTED

Form	
Form	41211

Technical Data	
Operating voltage	max. 60 V AC/DC
Rated surge voltage	1.5 kV

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17

Operating current per contact	max. 4 A
Locking of ports	Screw thread (M8/M12×1 mm) recommended torque 0.4/0.6 Nm, self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
General data	
Temperature range	-25...+85 °C
Product article number of manufacturer	7000-41211-0000000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17