
Starfix™ ferrules and crimping tools


0 376 50


0 376 60


0 376 61


0 376 62


0 376 63



0 376 87


0 376 64


0 376 66



0 376 67


0 376 68


0 376 77


0 377 64


0 376 43

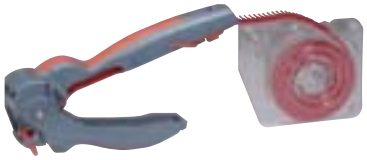
0 376 09 with refill Cat.No 0 376 43


0 376 39


Cross-section adjustment


0 376 06


0 376 92

Correspondance table ans dimensions **p. 313**

Ferrules with insulating flange

Provide an equipotential link for all the strands of a flexible conductor
Active part in tinned electrolytic copper
Conform to NF C 63-023

Singles - supplied in strips

Pack	Cat.Nos	Cross-section (mm²)	Colour	Number of strips or sachets	Number of ferrules per strip or sachet
500	0 376 50	0.25	turquoise	10	50
500	0 376 60	0.34	green	10	50
480	0 376 61	0.5	white	12	40
480	0 376 62	0.75	blue	12	40
1000	0 376 63	1	red	25	40
1000	0 376 64	1.5	black	25	40
1000	0 376 66	2.5	grey	25	40
250	0 376 67	4	orange	10	25
250	0 376 68	6	green	10	25

Singles - individual ferrules (sachet packing)

500	0 377 50	0.25	turquoise	5	100
500	0 377 60	0.34	green	5	100
1000	0 377 61	0.5	white	10	100
1000	0 377 62	0.75	blue	10	100
1000	0 377 63	1	red	10	100
1000	0 377 64	1.5	black	10	100
1000	0 377 66	2.5	grey	10	100
250	0 377 67	4	orange	5	50
250	0 377 68	6	green	5	50

Singles - individual ferrules (box packing)

100	0 376 69	10	brown
100	0 376 72[1]	16	white
100	0 376 70	16	white
50	0 376 71	25	black
50	0 376 77	35	red
30	0 376 78	50	blue

Doubles - individual ferrules

500	0 376 87	2 x 0.75	blue
500	0 376 88	2 x 1	red
500	0 376 89	2 x 1.5	black
500	0 376 90	2 x 2.5	grey

Singles - supplied as refills

Large capacity for less frequent applicator reloading
Translucent refills for direct mounting on crimping tool Cat.No 0 376 09

Pack	Cat.Nos	Cross-section (mm²)	Colour	Number of ferrules per refills
3000	0 376 41	0.5	white	300
3000	0 376 42	0.75	blue	300
3000	0 376 43	1	red	300
3000	0 376 44	1.5	black	300
2500	0 376 45	1.5	grey	250

1: Short ferrule

Crimping tools for ferrules in strips

Cut and crimp of ferrules from 0.25 to 6 mm² in one operation

Starfix crimping tool for 0.25 and 0.34 mm² cross-sections

1 — 0 376 08 — Supplied fitted with empty applicator

Starfix crimping tool for 0.5 to 2.5 mm² cross-sections

1 — 0 376 09 — Supplied fitted with empty applicator

1 — 0 376 39 — Assorted kit, comprising:
- 1 Starfix crimping tool, Cat. No. 0 376 09 fitted with empty applicator
- 120 x 0.5 mm² ferrules
- 120 x 0.75 mm² ferrules
- 240 x 1 mm² ferrules
- 320 x 1.5 mm² ferrules
- 200 x 2.5 mm² ferrules

Starfix crimping tool for 4 and 6 mm² cross-sections

1 — 0 376 10 — Supplied fitted with empty applicator

Starfix S multi-purpose crimping tool for 0.5 to 2.5 mm² cross-sections

1 — 0 376 97 — Tool cuts, strips, twists and crimps wire
Supplied with 5 empty applicators

4-point crimping tool for individual single and double ferrules

For right or left-handed

Starfix crimping tool for 0.25 to 6 mm² cross-sections

For crimping of 0.25 to 6 mm² cross section ferrules

1 — 0 376 06 — Crimping tool with disengageable control system, crimping at end


Starfix crimping tool for 10 to 50 mm² cross-sections

1 — 0 376 92 — Assorted kit comprising:
- 1 crimping tool with disengageable control system for individual ferrules 10 to 50 mm²
- 30 individual ferrules 10 mm²
- 20 individual ferrules 16 mm²
- 15 individual ferrules 25 mm²
- 10 individual ferrules 35 mm²
- 10 individual ferrules 50 mm²

Starfix™ applicator




0 376 47



Example of simple/double ferrules on wires





Example of different wires and ferrules

Pack	Cat.Nos	Starfix applicator	
		For Starfix crimping tool For dispensing strips of ferrules in Starfix crimping tools Cat.Nos 0 376 08/09/10	
		For ferrules cross-section (mm²)	Colour
10	0 376 46	0.25 and 0.34	yellow
10	0 376 47	0.5 to 2.5	red
10	0 376 48	4 and 6	orange

Viking 3 terminal blocks and accessories
(p. 296 to 311)


Starfix™ ferrules and crimping tools

■ Correspondence table

Cross-section (mm²) / Ferrule	Simple ferrule	Large capacity ferrule - refills	Starfix applicator
0.5	0 376 61	0 376 41	0 376 47
0.75	0 376 62	0 376 42	0 376 47
1	0 376 63	0 376 43	0 376 47
1.5	0 376 64	0 376 44	0 376 47
2.5	0 376 66	0 376 45	0 376 47


■ Dimensions (mm)

Simple ferrules



Cat.Nos			Cross-section (mm²)	A	B	C	D
0 376 50	**0 377 50**		0.25	8	14.5	1.1	3
0 376 60	**0 377 60**		0.34	8	14.5	1.1	3
0 376 61	**0 377 61**	**0 376 41**	0.5	8	14.5	1.5	3.4
0 376 62	**0 377 62**	**0 376 42**	0.75	8	14.5	1.5	3.4
0 376 63	**0 377 63**	**0 376 43**	1	8	14.5	1.7	3.6
0 376 64	**0 377 64**	**0 376 44**	1.5	8	14.5	2	4.1
0 376 66	**0 377 66**	**0 376 45**	2.5	8	14.5	2.6	4.8
0 376 67	**0 377 67**		4	12	21	3.2	5.7
0 376 68	**0 377 68**		6	12	23	3.9	7.2
0 376 69			10	12	21	4.9	8.1
0 376 72			16	12	23	6.3	9.8
0 376 70			16	18	29	6.3	9.8
0 376 71			25	18	31	7.9	12
0 376 77			35	18	32	8.9	13.5
0 376 78			50	20	36	11.1	16.1

Double ferrules



Cat.Nos	Cross-section (mm²)	A	B	C	D	E
0 376 87	**2 x 0.75**	8	15	2.1	6	3.3
0 376 88	**2 x 1**	8	15	2.35	6	4
0 376 89	**2 x 1.5**	8	16	2.6	7.2	4.2
0 376 90	**2 x 2.5**	10	18.5	3.3	8.4	4.8

■ Example of use

Starfix tool Cat.Nos 0 376 08/09/10/39



1 Fit the applicator



2 Adjust



The 2-material handle gives an excellent grip




3 Insert the wire and crimp


Starfix S tool Cat.No 0 376 97



1 Adjust the cross-section



2 Strip and twist



3 Crimp

KLINKMANN
www.klinkmann.com

Helsinki
tel. +358 9 540 4940
automation@klinkmann.fi

St. Petersburg
tel. +7 812 327 3752
klinkmann@klinkmann.spb.ru

Moscow
tel. +7 495 641 1616
moscow@klinkmann.spb.ru

Yekaterinburg
tel. +7 343 287 19 19
yekaterinburg@klinkmann.spb.ru

Samara
tel. +7 846 273 95 85
samara@klinkmann.spb.ru

Kiev
tel. +38 044 495 33 40
klinkmann@klinkmann.kiev.ua

Riga
tel. +371 6738 1617
klinkmann@klinkmann.lv

Vilnius
tel. +370 5 215 1646
post@klinkmann.lt

Tallinn
tel. +372 668 4500
klinkmann.est@klinkmann.ee

Minsk
tel. +375 17 200 0876
minsk@klinkmann.com