HIRSCHMANN® Test & Measurement
A BRAND OF SKS

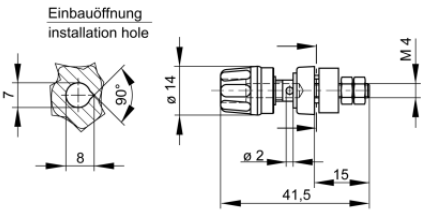
SKS Kontakttechnik GmbH

Sockets

PKI 10 A



CE

Product	PKI 10 A
description	Pole terminal with claw edge and captive insulated head and insulated ring. 4 mm diameter nickel-plated brass threaded bolt with 2 mm diameter transverse hole. For insulated, non-rotating installation in equipment chassis and switchpanels with a wall thickness up to 2 mm.
operating instruction	BA402
article-no. / *colour	9301031xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 05 brown · 06 gray · 07 white · 09 violet · 88 yellow green Ni
drawing	
	
technical data	
connection	M4 thread
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	35 A
material socket	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010(1)	-25 °C to +100 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2

(1) contact the manufacturer for applications at deviating temperature ranges

4 mm system

[2] without rated measurement category, for other circuits that are not directly connected to mains
stand: 21.06.2022

stand: 21.06.2022