Q25 Sensors – dc-Voltage Series

Self-contained, dc-operated sensors

Installation Guide

Additional information on this product is immediately available online at www.bannerengineering.com/116165

View or download additional information, including excess gain curves, beam patterns and accessories.
For further assistance, contact a Banner Engineering Applications Engineer at (763) 544-3164 or (888) 373-6767.

EZ BEAM



Sensing Mode		Range	LED	Output	Model*
	**Opposed**	20 m (66')	Infrared 950 nm	–	**Q256E**
				NPN	**Q25SN6R**
				PNP	**Q25SP6R**
	**Polarized Retro-reflective**	2 m (79")	Visible Red 680 nm	NPN	**Q25SN6LP**
				PNP	**Q25SP6LP**
	**Fixed Field**	25 mm (1") cutoff	Infrared 880 nm	NPN	**Q25SN6FF25**
				PNP	**Q25SP6FF25**
		50 mm (2") cutoff		NPN	**Q25SN6FF50**
				PNP	**Q25SP6FF50**
		100 mm (4") cutoff		NPN	**Q25SN6FF100**
				PNP	**Q25SP6FF100**

* Standard 2 m (6.5') cable models are listed.
- **9 m (30') cable:** add suffix **"W/30"** (e.g., **Q256E W/30**).
- **4-pin Euro-style QD models:** add suffix **"Q"** (e.g., **Q256EQ**). A model with a QD connector requires a mating cable.

Cabled Emitters



QD Emitters



NPN (Sinking) Outputs

Standard Hookup



Alarm Hookup



PNP (Sourcing) Outputs

Standard Hookup



Alarm Hookup



NOTE: QD hookups are functionally identical.

Dimensions

Cabled Models

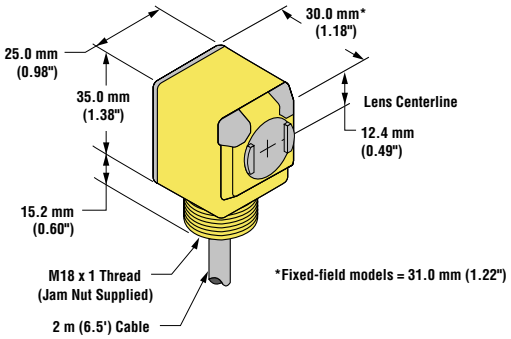

QD Models



WARNING . . . Not To Be Used for Personnel Protection

Never use these products as sensing devices for personnel protection. Doing so could lead to serious injury or death. These sensors do NOT include the self-checking redundant circuitry necessary to allow their use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition. Consult your current Banner Safety Products catalog for safety products which meet OSHA, ANSI and IEC standards for personnel protection.

EZ BEAM Q25 Sensors – dc-Voltage Series

Specifications

Supply Voltage and Current (exclusive of load current): 10 to 30V dc (10% max. ripple); supply current (exclusive of load current):
Emitters: 25 mA
Receivers: 20 mA
Polarized Retroreflective: 30 mA
Fixed-Field: 35 mA

Supply Protection Circuitry
Protected against reverse polarity and transient voltages

Output Configuration
SPDT solid-state dc switch; Choose NPN (current sinking) or PNP (current sourcing) models
Light Operate: N.O. output conducts when sensor sees its own (or the emitter's) modulated light
Dark Operate: N.C. output conducts when the sensor sees dark; the N.C. (normally closed) output may be wired as a normally open marginal signal alarm output, depending upon hookup to power supply (U.S. patent 5087838)

Output Rating
150 mA maximum (each) in standard hookup. When wired for alarm output, the total load may not exceed 150 mA.
OFF-state leakage current: < 1 microamp @ 30V dc
ON-state saturation voltage: < 1V at 10 mA dc; < 1.5V at 150 mA dc

Output Protection Circuitry
Protected against false pulse on power-up and continuous overload or short circuit of outputs

Output Response Time
Opposed mode: 3 ms ON, 1.5 ms OFF
Polarized Retro and Fixed-Field: 3 ms ON and OFF
NOTE: 100 ms delay on power-up; outputs do not conduct during this time.

Repeatability
Opposed mode: 375 µs
Polarized Retro and Fixed-Field: 750 µs
Repeatability and response are independent of signal strength.

Indicators
Two LEDs (Green and Yellow)
Green ON steady: power to sensor is ON
Green flashing: output is overloaded
Yellow ON steady: N.O. output is conducting
Yellow flashing: excess gain marginal (1 to 1.5x) in light condition

Construction
PBT polyester housing; polycarbonate (opposed-mode) or acrylic lens

Environmental Rating
Leakproof design rated NEMA 6P, DIN 40050 (IP69K)

Connections
2 m (6.5') or 9 m (30') attached cable, or 4-pin Euro-style quick-disconnect fitting

Operating Conditions
Temperature: -40° to +70°C (-40° to +158°F)
Maximum relative humidity: 90% at 50°C (non-condensing)

Vibration and Mechanical Shock
All models meet Mil. Std. 202F requirements. Method 201A (Vibration; frequency 10 to 60 Hz, max., double amplitude 0.06" acceleration 10G). Method 213B conditions H&I (Shock: 75G with unit operating; 100G for non-operation)

Certifications

Quick-Disconnect (QD) Cables

Style	Model	Length	Dimensions	Pinout
4-pin Euro-style Straight	**MQDC-406** **MQDC-415** **MQDC-430**	2 m (6.5') 5 m (15') 9 m (30')		
4-pin Euro-style Right-angle	**MQDC-406RA** **MQDC-415RA** **MQDC-430RA**	2 m (6.5') 5 m (15') 9 m (30')		

Additional information on this product is immediately available online at **www.bannerengineering.com/116165**

View or download additional information, including excess gain curves, beam patterns and accessories.
For further assistance, contact a Banner Engineering Applications Engineer at (763) 544-3164 or (888) 373-6767.

BANNER®
more sensors, more solutions

WARRANTY: Banner Engineering Corp. warrants its products to be free from defects for one year. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture found to be defective at the time it is returned to the factory during the warranty period. This warranty does not cover damage or liability for the improper application of Banner products. This warranty is in lieu of any other warranty either expressed or implied.

Banner Engineering Corp., 9714 Tenth Ave. No., Minneapolis, MN USA 55441 • Phone: 763.544.3164 • www.bannerengineering.com • Email: sensors@bannerengineering.com