MURR ELEKTRONIK
stay connected

M12 male recept. A-cod. front


PP-wires 5x0.34 0.2m


Flange male
M12, 5-pole
Front mounting
with multi-strand wire


Link to Product

Illustration



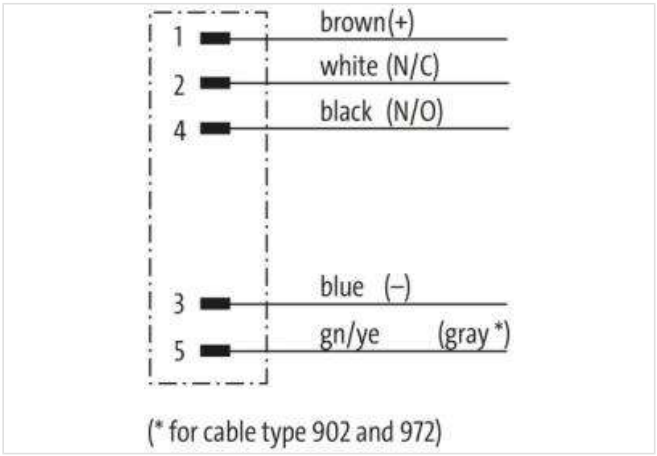

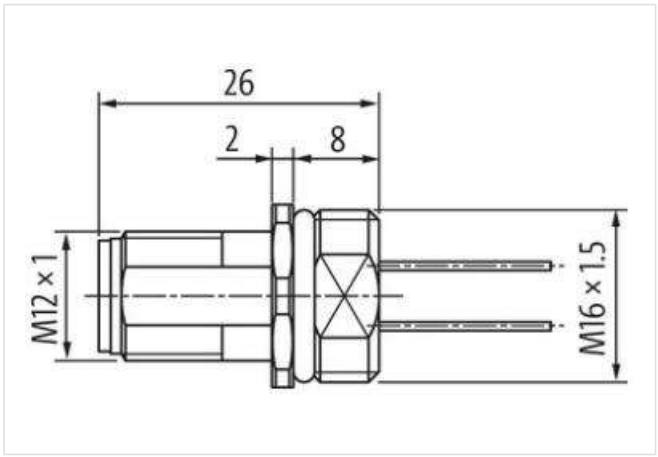

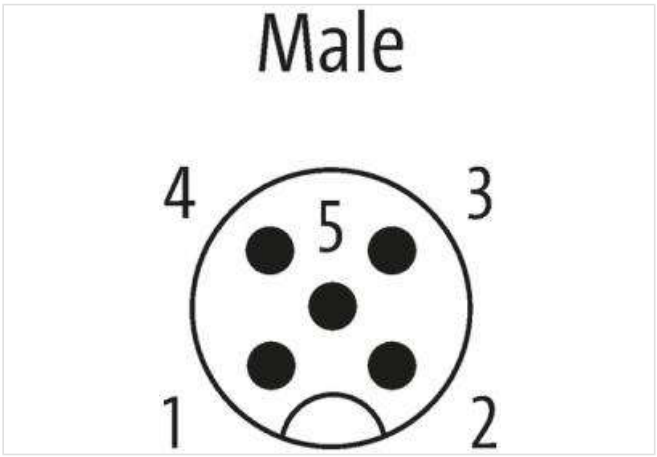

Product may differ from Image

Form

Form	13521

Technical Data

Operating voltage	max. 125 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17

No. of poles	5
Material group	IEC 60664-1, category I
Coding	M12, A-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Protection NEMA	3, 4, 6P (UL 50E)
Locking material	Zinc die casting, matte nickel plated
Compression gland	M12 (SW14)
Configuration	fully used
General data	
Pollution Degree	3
Temperature range	-25...+85 °C
Cables	
No./diameter of wires	5× 0.34 mm²
Wire isolation	PUR (br, wh, bl, bk, gr)
Outer Ø	1.3 mm ±5%
Cable number	972
Material wire	Cu wire, tin plated
Resistor (core)	max. 58 Ω/km (20 °C)
Nominal voltage	300 V AC
Test voltage	1500 V AC
Temperature range (fixed)	-40...+90 °C
Temperature range (mobile)	-25...+90 °C
Product article number of manufacturer	7000-13521-9720020
Cable length	0,2 m

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17