

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	02/16/01	MCCORMICK
B	ECN 1781 DRAWING UPDATE	06/30/04	MCCORMICK
C	ECN 4016: ADD SHELL TO SHELL IN WIRE MAP, NEW FORMAT	5/20/09	D.FRISIELLO

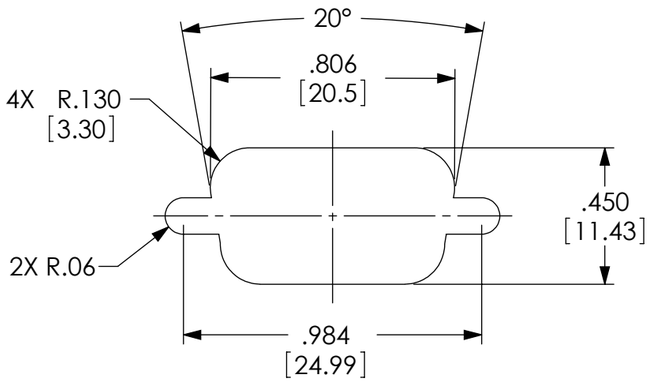


RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")


DB9F	DB9M
PIN 1 & 6	PIN 4
PIN 2	PIN 3
PIN 3	PIN 2
PIN 4	PIN 1 & 6
PIN 5	PIN 5
PIN 7	PIN 8
PIN 8	PIN 7
N/C	N/C
SHELL	SHELL

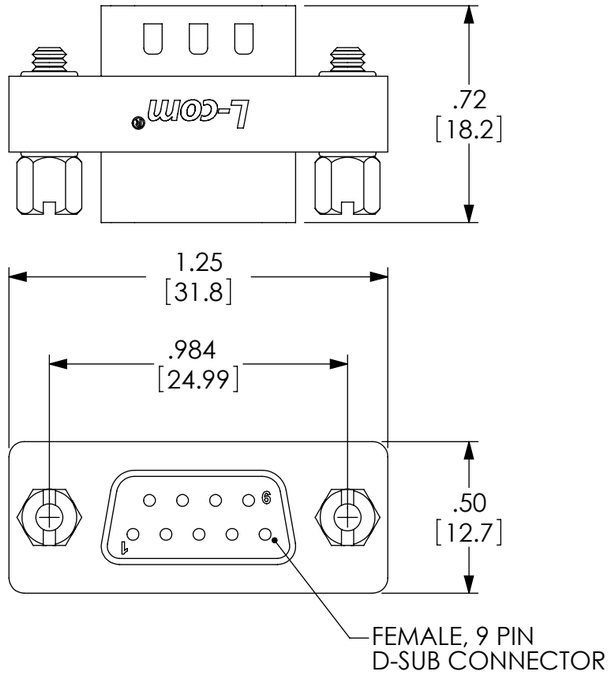


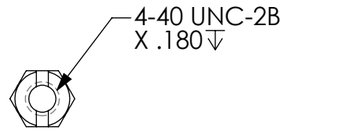

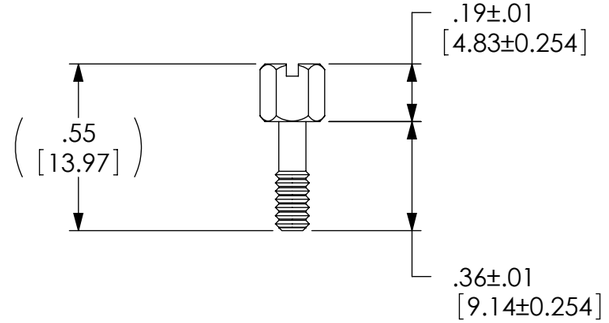

JACKSCREW
SPECIFICATION

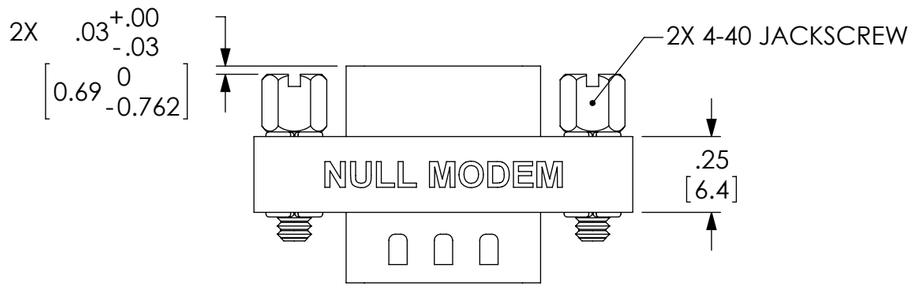

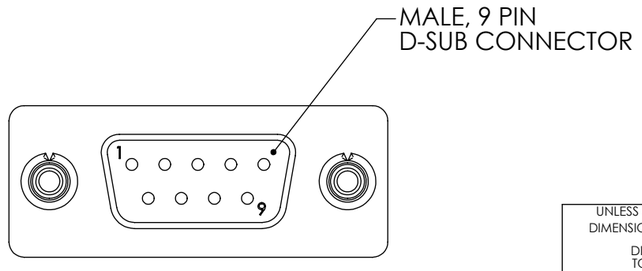

NOTES:

MATERIAL:
SHELL: STEEL
CONTACTS/TERMINALS: COPPER ALLOY
HARDWARE: BRASS
INSULATOR: PBT FIBER REINFORCED (UL94V-0)

FINISH:
SHELL: TIN/NICKEL PLATE
CONTACTS/TERMINALS: GOLD FLASH PLATED: 1-1.5µ INCHES.
HARDWARE: NICKEL PLATED.

LABELING:
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.
"NULL MODEM" FONT ARIAL BOLD, TEXT HEIGHTS; .085"
TEXT COLOR; WHITE.

ELECTRICAL:
CURRENT RATING: 3 AMP

COMPONENT SHALL BE TESTED FOR CONTINUITY.
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN A POLY BAG.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.01
.XXX = ±.005

ANGULAR TOLERANCES:
ALL = ± 1°

PROJECTION

APPROVALS	DATE
DRAWN BY C.MCCORMICK	02/12/2001
CHECKED BY D.PARHAM	02/12/2001
APPROVED BY R.CARRICK	02/12/2001

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY

PRODUCT DESCRIPTION
NULL MODEM, DB9 MALE/FEMALE

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	DMA060MF	C

SCALE: 2:1 | CAD FILE: DMA060MF.SLDDRW | SHEET 1 OF 1