SCHAEFFLER

Angular contact ball bearings

7201-B-XL-2RS-TVP (Series 72..-B-2RS)

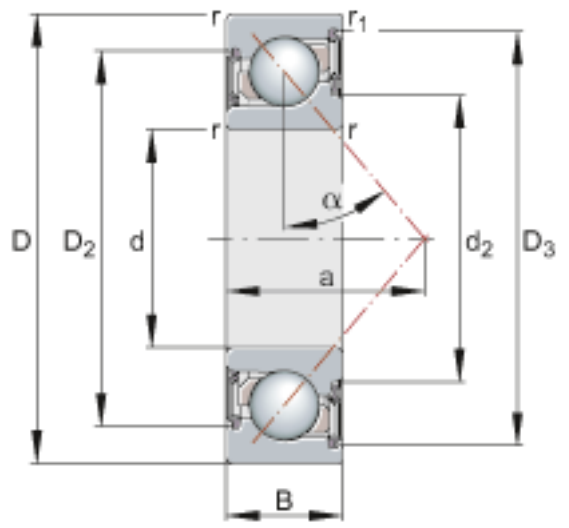
main dimensions to DIN 628-1, contact angle α = 40°, lip seals on both sides

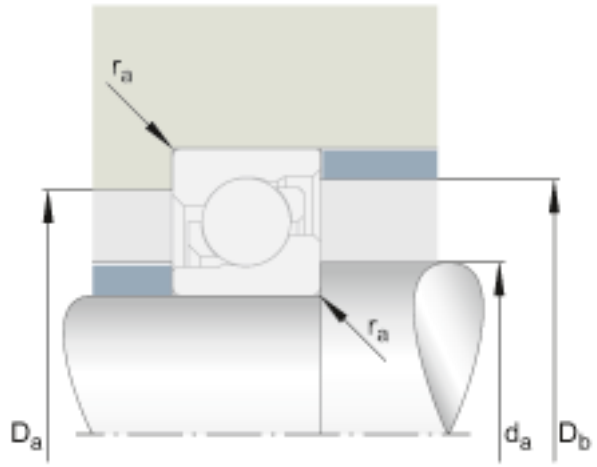
The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue selection system (https://www.schaeffler.de/content.schaeffler.de/en/news_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

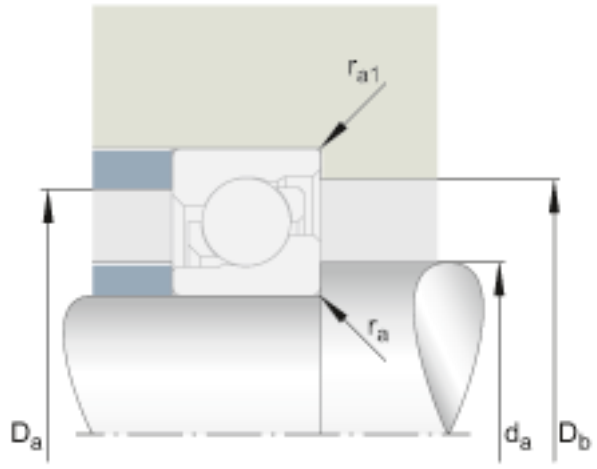
d	12 mm
D	32 mm
B	10 mm
a	14 mm
D_1	24,6 mm
D_2	25,9 mm
d_2	17 mm
D_3	28,8 mm
$D_{a\ max}$	27,8 mm
$d_{a\ min}$	16,2 mm
$D_{b\ max}$	29,6 mm

$r_{1\ min}$	0,3 mm	
$r_{a1\ max}$	0,3 mm	
$r_{a\ max}$	0,6 mm	
r_{min}	0,6 mm	
α	40 °	Contact angle

m	0,037 kg	Mass
C_r	7400 N	Basic dynamic load rating, radial
C_{0r}	3550 N	Basic static load rating, radial
C_{ur}	248 N	Fatigue limit load, radial
n_G	14800 1/min	Limiting speed




r_a
r_a
D_a
d_a
D_b


r_{a1}
r_a
D_a
d_a
D_b