
P 30 TF


AYP_001_HC_HH_HY-AYL_001_HP.XX_NOTES_UL.category

- No order designation, order individual appertaining products

Material	Pressed steel

Dimensions

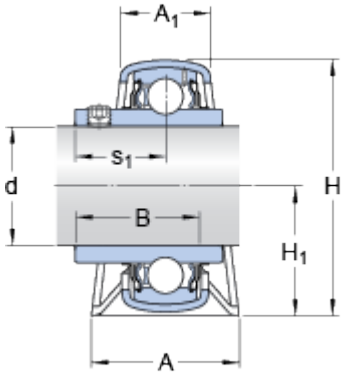

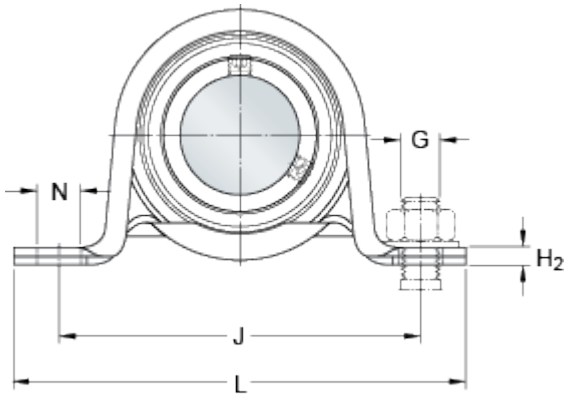

d	30	mm
A	38	mm
A_1	25	mm
B	38.1	mm
H	66	mm
H_1	33	mm
H_2	4	mm
J	95	mm
L	119	mm
N	11.2	mm
s_1	22.2	mm

Dowel pins

Grease fitting

Threaded hole

Calculation data

Basic dynamic load rating	C		19.5	kN
Basic static load rating	C_0		11.2	kN
Fatigue load limit	P_u		0.475	kN
Permissible radial housing load		max.	2.6	kN
Limiting speed			6300	r/min

(with shaft tolerance h6)

Mass

Mass of unit		0.45	kg

Mounting information

Hexagonal key size for grub screw	N	3	mm
Recommended tightening torque for grub screw		4	N·m
Recommended diameter for attachment bolts, mm	G	10	mm
Recommended diameter for attachment bolts, inch	G	0.375	in

Appertaining products

Housing	P 62
Bearing	YAR 206-2F