
Multi-Contact

STÄUBLI

SLB2-R



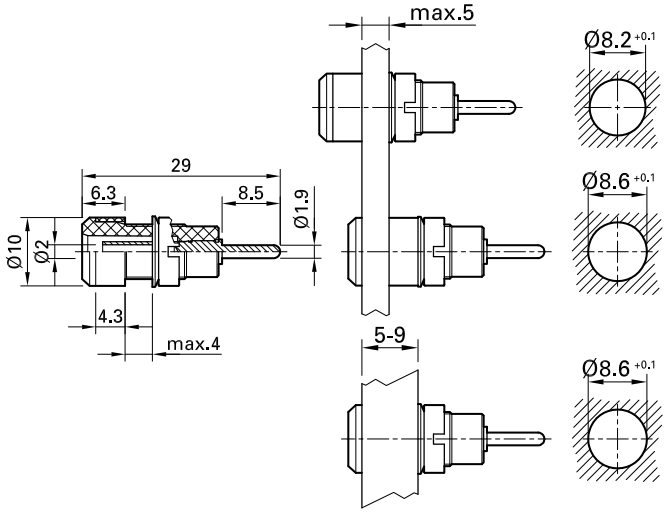

Item number 65.9194-*

Insulated, rigid, accepting spring-loaded Ø 2 mm plugs with rigid insulating sleeve. The socket is surface-mounted or assembled flush into pre-drilled panels of plastic, metal, etc.Connection: Flat connecting tab 2.8 mm x 0.8 mm.

Technical data	
Diameter of plug system	2 mm
Rated Values	600 V, CAT III, 10 A / 1000 V, CAT II, 10 A
Surface treatment electrical contact	Au
Base material electrical contact	CuZn
Colours *	21 22 23 24 25 29
Test accessory acc. to	IEC EN 61010-2-030
Supplied assembly material	MUR/M8x0,5; SP4
Approvals	UR
Remarks	Accessories: Flat connecting receptacle FSH2,8x0,8; Tube spanner SS4; Tube spanner SS2-S

Stäubli Electrical Connectors AG Stockbrunnenrain 8 4123 Allschwil/Switzerland
Tel.: +41 61 306 55 55 Fax: +41 61 306 55 56 ec.ch@staubli.com www.staubli.com

©2018 Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. Data sheet SLB2-R 10.2018