S.LA - 1/2" long-reach metric 12-point sockets



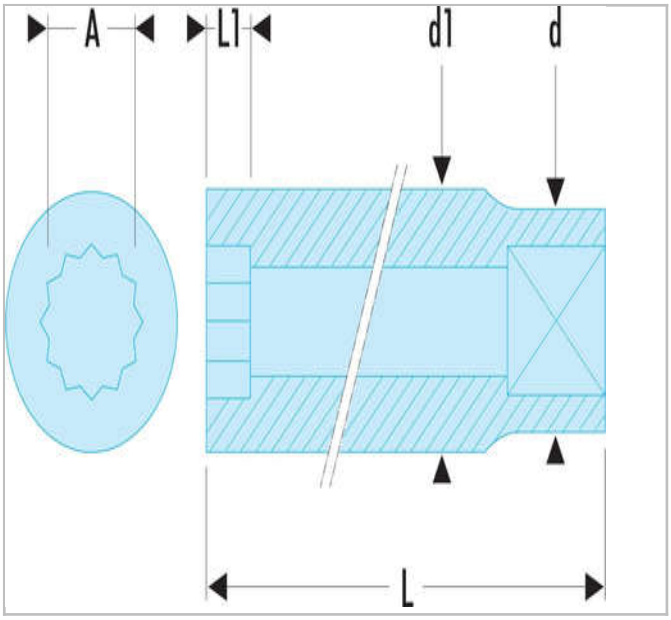

Standards:

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5

Description:

- OGV® profile: more powerful tightening, preserves fasteners.
- Long-reach sockets for long recess or thread access.
- Finish: bright chrome.

© FACOM 2020

	A [mm]	Diameter [mm]	Diameter D1 [mm]	Length L [mm]	Length L1 [mm]	12-Point [mm]	Weight [g]
S.12LA	12.0	12.0	21.8	77.0	12.0	12.0	105.0
S.13LA	13.0	21.8	19.0	77.0	12.0	12.0	115.0
S.14LA	14.0	27.8	20.3	77.0	15.0	12.0	120.0
S.15LA	15.0	21.8	21.5	77.0	15.0	12.0	125.0
S.16LA	16.0	22.0	22.8	77.0	15.0	12.0	130.0
S.17LA	17.0	23.0	24.0	77.0	15.0	12.0	140.0
S.18LA	18.0	24.0	25.0	77.0	18.0	12.0	160.0
S.19LA	19.0	25.0	26.5	77.0	18.0	12.0	160.0
S.21LA	21.0	27.0	29.0	77.0	18.0	12.0	200.0
S.22LA	22.0	28.0	30.0	77.0	21.0	12.0	215.0
S.23LA	23.0	29.0	31.5	77.0	21.0	12.0	235.0
S.24LA	24.0	30.0	32.8	77.0	24.0	12.0	255.0
S.26LA	26.0	32.0	35.0	77.0	24.0	12.0	280.0
S.27LA	27.0	33.0	36.5	77.0	27.0	12.0	310.0
S.28LA	28.0	34.0	37.8	77.0	27.0	12.0	330.0
S.29LA	29.0	35.0	39.0	77.0	27.0	12.0	355.0
S.30LA	30.0	36.0	40.0	77.0	30.0	12.0	355.0
S.32LA	32.0	36.0	42.8	77.0	33.0	12.0	410.0

© FACOM 2020