
Single-Pole Round Rocker Switch

SR Series



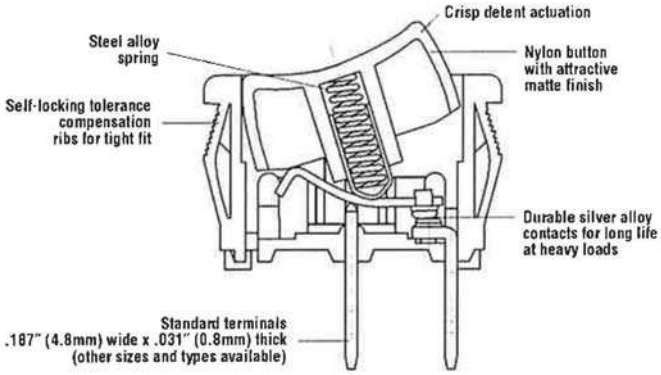

Features

- 20 amp switching in a compact design
- Self locking tabs and anti-rotation pin for snug fit
- Mechanical life: min. 50,000 operations

Electrical Ratings				
Switch Series	**EN61058 Rating**	**UL1054 Rating**	**Electrical Life at Rated Load**	
			According to VDE (Min. Operations)	**According to UL** (Min. Operations)
SR	N/A	20A, 125VAC; 12A, 250VAC	N/A	6,000

Electrical Specifications		Material Specifications	
Ratings:	20A, 125VAC; 12A, 250VAC	**Actuator:**	Nylon 66 94V-2
		Base:	Nylon 66 94V-2
Dielectric Strength:	1000VAC for 1 minute	**Spring:**	Steel Wire
Insulation Resistance:	100M ohms min at 500VDC	**Contacts:**	Silver Alloy
Initial Contact Resistance:	0.020 ohms max	**Movable Arm:**	Silver-Plated Copper Alloy
Temperature Range:	-20°C to + 65°C	**Terminals:**	Tin-Plated Copper Alloy


RoHS Compliant
UL File No: E23301

Specifications subject to change without notice.


Single-Pole Round Rocker Switch

SR Series

Dimensions inches (mm)

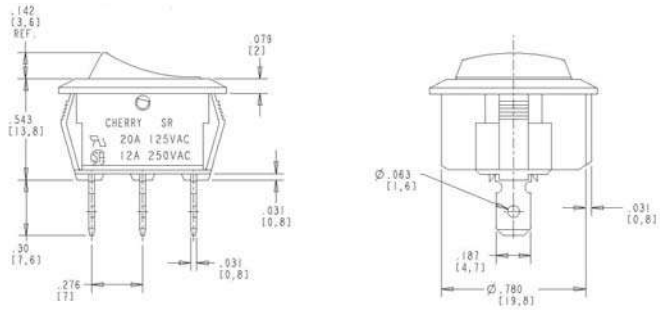

Recommended Panel Cut-Out Dimensions inches

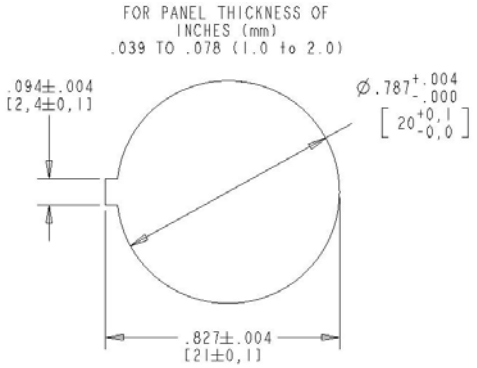

Ordering Information

SR	J	2	2	A	3	F	B	B	N	N
Series		Circuitry	Switch Function		Actuator Type		Housing Color		Lighted	
		2 Single Pole	2 On - Off		3 Round		B Black		N Non-Lighted	
			3 On - On				W White			
							Y Grey			

Code	Contact Rating
J	20A, 125VAC 12A, 250VAC (UL, cUL)

Code	Terminal type inches (mm)
A	0.187 (4.8) QC

Code	Actuator Marking
B	Blank
C	O I
D	O I
E	O I
F	O –

Code	Actuator Color
B	Black
W	White
Y	Grey

Code	Splashproof
N	No Rocker Boot

Examples of Common Part Numbers and Descriptions inches (mm)

Part Number	Circuitry	Switch Function	Terminal Type	Actuator/ Housing Color	Legend Marking
SRJ22A3BBBNN		On – Off	0.187 (4.80) Quick-Connect	Black/ Black	
SRJ23A3BBBNN		On – On	0.187 (4.80) Quick-Connect	Black/ Black	
SRJ22A3WWNN		On – Off	0.187 (4.80) Quick-Connect	White/ White	
SRJ22A3FBBNN		On – Off	0.187 (4.80) Quick-Connect	Black/ Black	O–

Contact

Call, fax or visit our Website for more information.

ZF Electronics Corporation
11200 88th Avenue
Pleasant Prairie, WI 53158

Phone: 262.942.6500
Web: www.cherrycorp.com
Email: cep_sales@zf.com
Fax: 262.942.6566

The manufacturer accepts no liability for errors or non-availability, and reserves the right to change specifications without prior notice.

Technical data relates to product specifications only. Features may differ from those described. Only drawings combined with product specifications shall be deemed binding.

© 2007 ZF Electronics Corporation

Last Updated: 12/5/11