Technical Specifications

BEAM GLIDE

Description:

« I » beam anchorage device fully adjustable for beam widths up to 360mm.

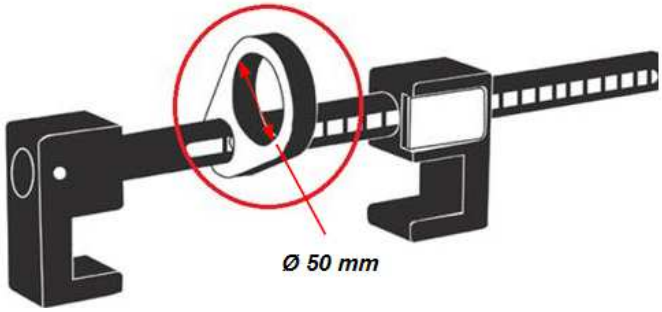

References: 1007066

Features:

Raw material : Aluminium alloy

MIN-MAX Beam Flange Width: 75mm - 360mm
MAX Beam Flange Thickness: 33mm

The device shall be connected such that it will not slide off the end of a beam and should not be attached to a beam which is inclined or sloped greater than 15° from horizontal.
Weight: 1.4 Kg

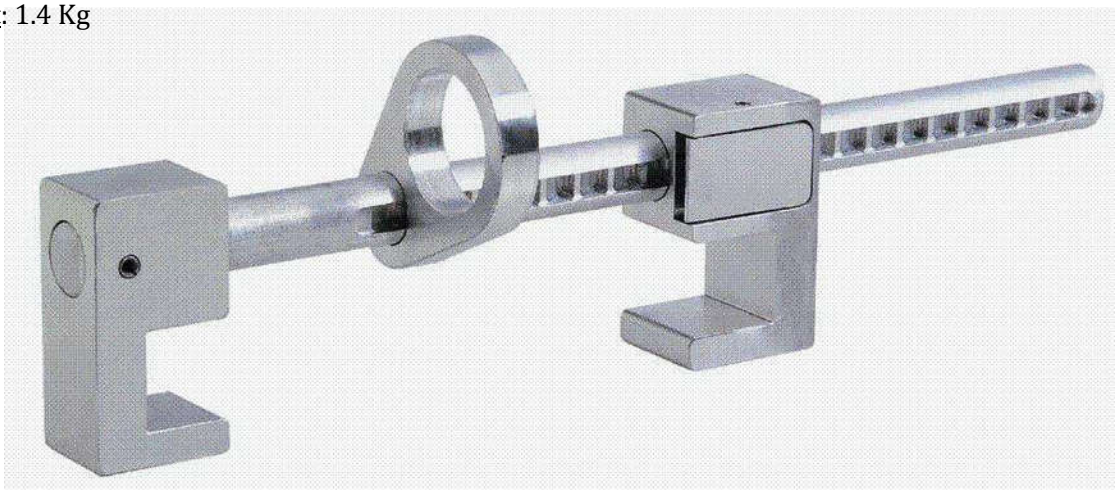

EN 795

LAW of 19 MARCH 93

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.

For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv.hsp@honeywell.com

HONEYWELL FALL PROTECTION FRANCE SAS
35-37 rue de la Bidauderie
F - 18100 Vierzon - France
Tel : +33 2 48 52 40 40
Fax : +33 2 48 71 04 97
Web site : www.honeywellsafety.com