stay connected

MIRO TR 24VDC FK 4P OPTO-COUPLER MODULE


IN: 53 VDC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A
24 V DC
Spring clamp terminals


Link to Product


Illustration



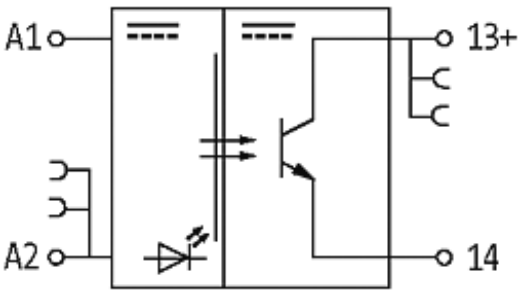

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

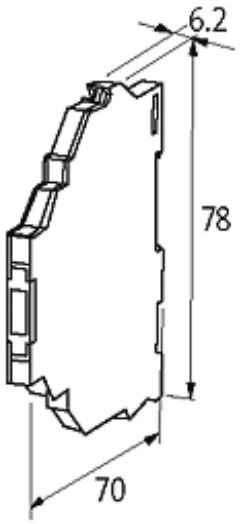

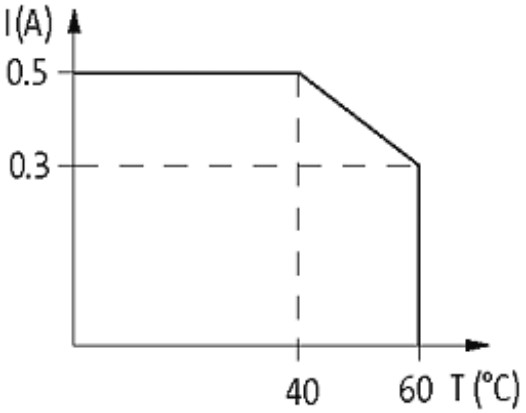

Product may differ from Image

Approvals

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	6 mA
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	90×6.2×65 mm

Output

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.5 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 10 µA
Switching time ON/OFF	35/400 µs
Switching frequency	max. 1000/100 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/16