
Part No. PFL2T


Issue	A	Date	30/03/2006
Drawn		Date	30/03/2006
Approved	P.J.H	Date	31/03/2006

Unless otherwise stated All Dimensions are in mm


General tolerance +/- 0.25mm

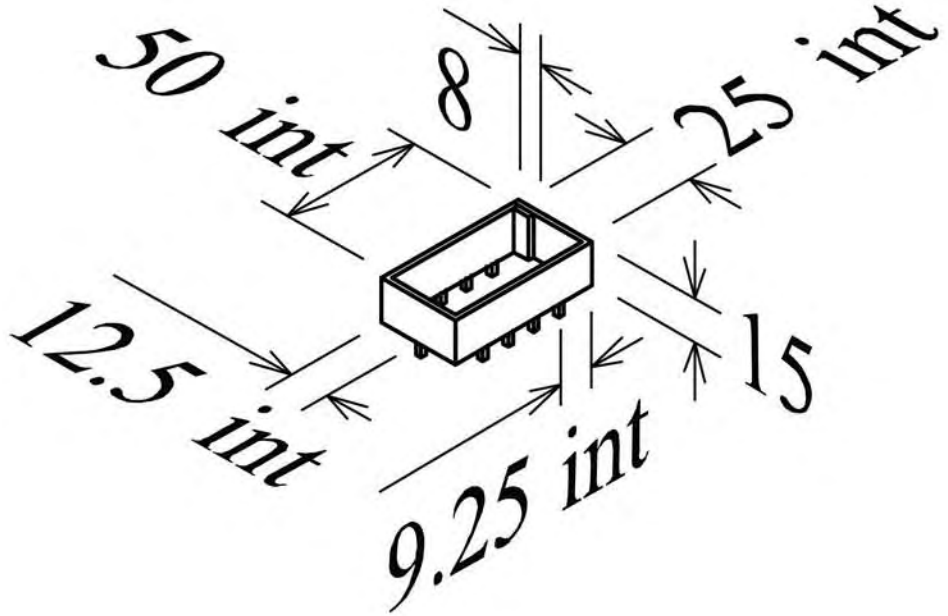

Note:
Supplied complete with a fingered lid

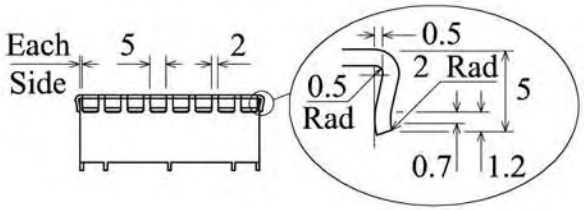

PCB Pin Size & Pitch

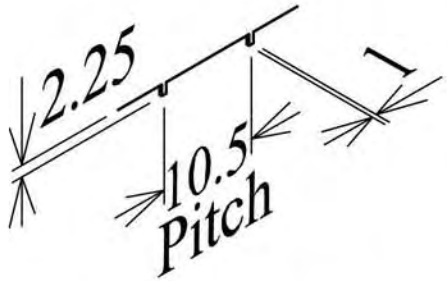

PCB Pin pitch tolerance +/- 0.10mm

Specification:

Material:	Bright Mild Steel BS EN 10130 DC01
Construction:	Overlapped Spot Welded Frame
Frames & Cans:	20swg (0.914mm)
Lids:	24swg (0.559mm)
Finish:	Bright Acid Tin - Good Commercial Grade
Surface Resistivity:	$20 \times 10^{-6} \Omega$ per square
Conductivity:	5×10^{4}mho

THIS DRAWING IS THE PROPERTY OF PERANCEA LTD AND MAY NOT BE COPIED OR REPRODUCED WITHOUT OUR WRITTEN CONSENT

PERANCEA LTD
ENCLOSURE AND INSTRUMENT CASE DESIGNERS AND MANUFACTURERS

Unit 36, Silicon Business Centre, Greenford, UB6 7JZ
Telephone: 020 8365 2520 Fax: 020 8566 7217
Email: sales@perancea.com Web: www.perancea.com