

Deep groove ball bearings, single row, low-friction seal on both sides

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designation
			dynamic	static		Reference speed	Limiting speed		
d	D	B	C	C_0	P_u				
mm			kN		kN	r/min		kg	-
20	32	7	4,03	2,32	0,104	45000	22000	0,018	61804-2RZ



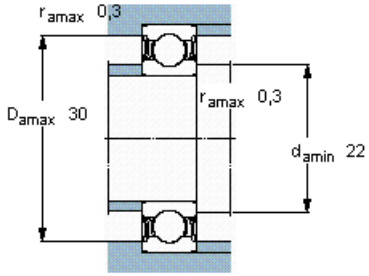

Calculation factors

k_r 0,015
f_0 15