
## (RT) Standard Bayonet Type

**RT-M06-L050-K01(1000).0059**




| | | |
|---|---|---|
| Max. operating temperature | : | -50 °C / +400 °C |
| Standard cable types | : | Fiber glass + fiber glass + braided wire |
| Sensor type | : | DIN/EN60751 Class “B’’ 1xPT-1000 |
| Protection tube material | : | Nickel coated brass |
| Connector | : | Standard 1/4 x 19” |

## Technical drawing

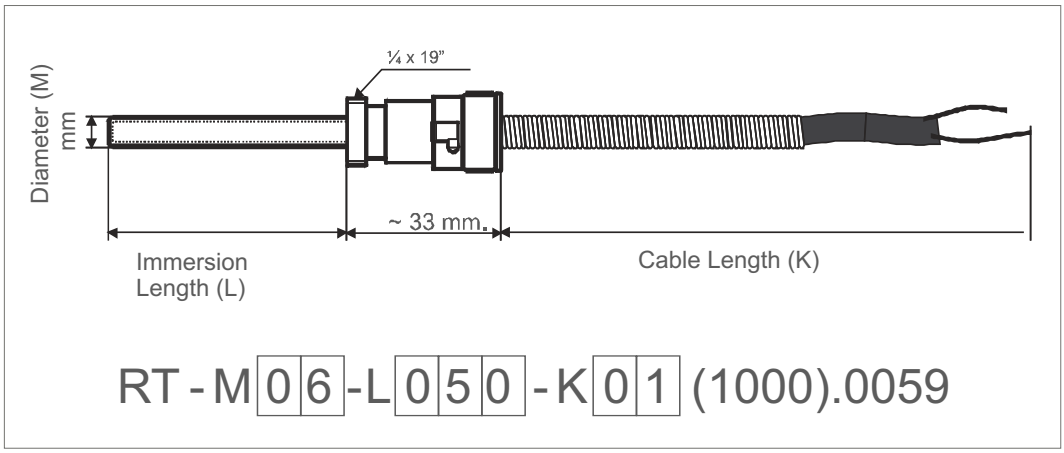


PT-1000 Connections




| | | |
|---|---|---|
| Diameter (M) | : | 6 mm |
| Immersion Length (L) | : | 50 mm |
| Cable Length (K) | : | 1 meter |