
REF : 4030 xxxx

Flat loudspeaker cables

S2CEB AUDIO VIDEO BROADCAST

Ed.4 05/08 TM

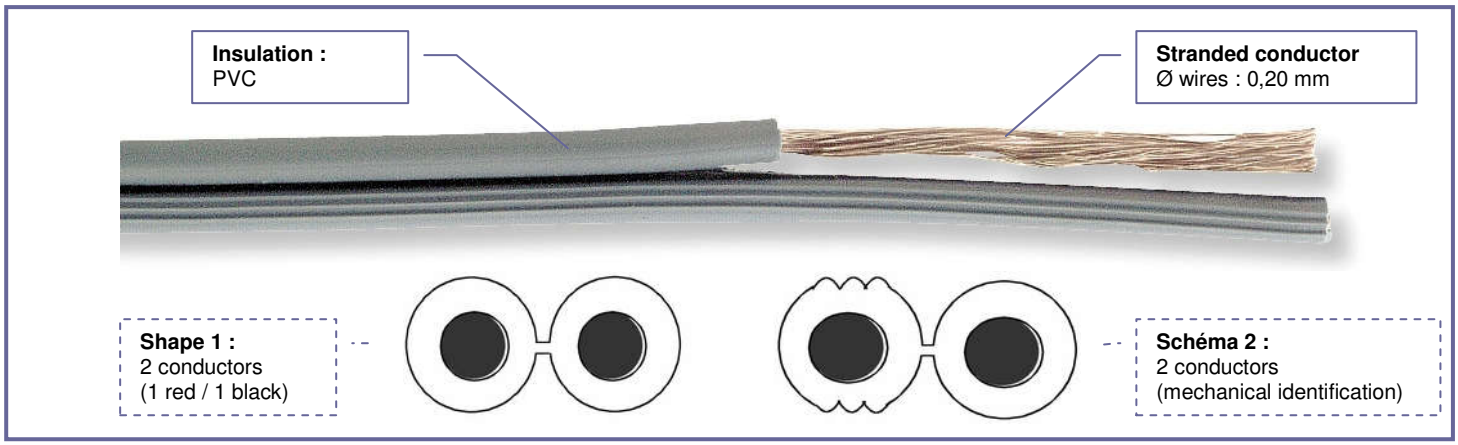

INFORMATIONS PRODUITS

Application

Wiring all types of sound systems.
For fixed and mobile installations.
100 Volts installations.
Conductor identification by colour (Red/Black) (Shape 1) or mechanical differentiation (Shape 2).

Electrical properties

Operating tension : **< 900 V**

Tension test : **2500 V**

Electrical resistance at 20°C :

0,5 mm² :	**61,9 Ω/km**
0,75 mm² :	**36,1 Ω/km**
1,0 mm² :	**27,1 Ω/km**
1,5 mm² :	**18,1 Ω/km**

Mechanical characteristics

Temperature range :
Static use: - 25°C → + 70°C
Dynamic use : - 5°C → + 70°C

Minimum bending radius :
8 x Ø

Conform to RoHS directive

Références produits

REF.	nxmm²	Stranded Conductor	mm ext.	Shape	Colours
4030.5082 N / B	2 x 0,50	14 x 0,20 mm	1,8 x 3,7	2	N : black / B: white
4030.4008	2 x 0,50	14 x 0,20 mm	1,8 x 3,7	1	Red / Black
4030.5067 N/G/B	2 x 0,75	24 x 0,20 mm	2,1 x 4,2	2	N : black / G :grey / B: white
4030.4089	2 x 0,75	24 x 0,20mm	2,1 x 4,2	1	Red / Black
4030.5122 N/G/B	2 x 1,0	32 x 0,20 mm	2,4 x 4,8	2	N : black / G :grey / B: white
4030.4150	2 x 1,0	32 x 0,20 mm	2,4 x 4,8	1	Red / Black
4030.5126 N/G/B	2 x 1,5	48 x 0,20 mm	2,6 x 5,2	2	N : black / G :grey / B: white
4030.7126 RN	2 x 1,5	48 x 0,20 mm	2,6 x 5,2	1	Red / Black

Ce document est confidentiel, et est la propriété de CAE Groupe. CAE Groupe possède un copyright, et le document ne doit pas être copié ou changé sous aucune forme, complètement ou en partie sans permission écrite de CAE Groupe. Les caractéristiques portées sur cette fiche ne sont pas contractuelles, et sont susceptibles d'être modifiées sans préavis.

cae GROUPE