C9-A4x

14-pin, miniature relay, 4-pole, plug-in, faston

Type			**C9-A4x/ ... V** Standard relays 4 change-over contacts
Maximum contact load			**5 A/250 V AC 1 5 A/30 V DC1**
Recommended minimum contact load			**10 mA/10 V Code 1** **5 mA/5 V Code 2**
Contacts			
Material	Standard	Code 1	AgNi + 0,2 µ Au
	Optional	Code 2	AgNi + 10 µ Au
Rated current			5 A
Switch-on current max. (20 ms)			15 A
Switching voltage max (same polarity)			250 V
AC load (Fig 1)			1,250 kVA
DC load			see Fig. 2
Coil			
Coil resistance			see table; tolerance ± 10 %
Pick-up voltage			≤ 0,8 x U_N
Release voltage			≥ 0,1 x U_N
Nominal power			1,2 VA (AC)/1 W (DC)

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	81
48	686	25	24	594	40
115	4K3	10,4	48	2K3	21
230	18K6	5,2	110	11K4	11

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3
Specifications	
Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	10 ms/≤ 3 ms
Release time/bounce time	6 ms/≤ 1 ms
Mechanical life ops	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	43 g

Standard types		
VAC 50 Hz/60 Hz: 24, 48, 115, 230 (240)	**C9-A41/AC ... V**	**C9-A42/AC ... V**
LED	**C9-A41X/AC ... V**	**C9-A42X/AC ... V**
VDC 12, 24, 48, 110	**C9-A41/DC ... V**	**C9-A42/DC ... V**
LED	**C9-A41X/DC ... V**	**C9-A42X/DC ... V**
Free wheeling diode	**C9-A41DX/DC ... V**	**C9-A42DX/DC ... V**
Polarity and free wheeling diode	**C9-A41FX/DC ... V**	**C9-A42FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C9-A41BX/UC ... V**	**C9-A42BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories	
Socket:	**S9-M, S9-L, S9-P, S9-P0**
Optional accessories (blanking plug):	**S9-NP, S9-OP**



Connection diagram



Fig. 1 AC voltage endurance

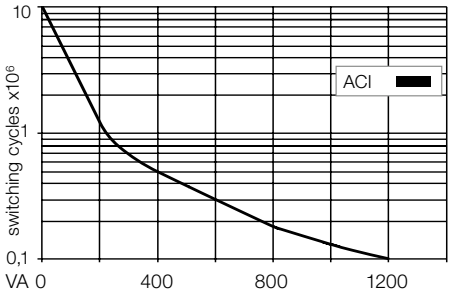

Fig. 2 DC load limit curve

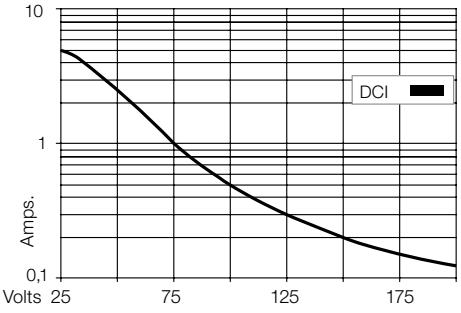

Dimensions [mm]

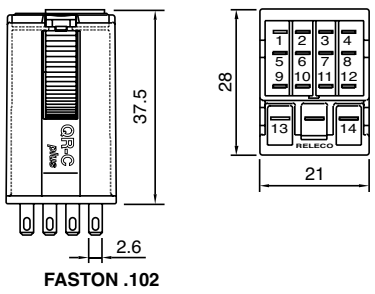

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947

C9-E2x

8-pin, miniature relay, 2-pole, plug-in, faston



Type			**C9-E2x/ ... V** Sensitive relay, 500 mW 2 change-over contacts		
DC operating range			**0,8 ...1,7 x U_N**		
Maximum contact load			**5 A/250 V**	**AC1**	**5 A/30 V** **DC1**
Recommended minimum contact load			**10 mA/10 V**	**Code 1**	
			5 mA/5 V	**Code 2**	
Contacts					
Material	Standard	Code 1	AgNi + 0,2 µ Au		
	Optional,	Code 2	AgNi + 10 µ Au		
Rated current			5 A		
Switch-on current max. (20 ms)			15 A		
Switching voltage max.			250 V		
AC load (Fig 1)			1200 VA		
DC load			see fig. 2		
Coil					
Coil resistance			see table; tolerance ± 10 %		
Pick-up voltage			≤ 0,8 x U_N		
Release voltage			≥ 0,1 x U_N		
Nominal power			0,8 VA (AC)/0,5 W (DC)		

Coil table

VAC	Ω	mA	VDC	Ω	mA
24	238	33	12	288	42
48	1K	17	24	1K1	21
115	5K9	7	48	4K6	10
230	23K9	3,5	110	24K2	4,5

Insulation	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2,5 kV
Contact/coil	2,5 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/3
Specifications	
Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Pick-up time/bounce time	10 ms/≤ 3 ms
Release time/bounce time	6 ms/≤ 1 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	40 g

Standard types		
VAC 50 Hz/60 Hz: 24, 48, 115, 230 (240)	**C9-E21/AC ... V**	**C9-E22/AC ... V**
LED	**C9-E21X/AC ... V**	**C9-E22X/AC ... V**
VDC 12, 24, 48, 110, 220	**C9-E21/DC ... V**	**C9-E22/DC ... V**
LED	**C9-E21X/DC ... V**	**C9-E22X/DC ... V**
Free wheeling diode	**C9-E21DX/DC ... V**	**C9-E22DX/DC ... V**
Polarity and free wheeling diode	**C9-E21FX/DC ... V**	**C9-E22FX/DC ... V**
AC/DC bridge rectifier 24 V, 48 V, 60 V	**C9-E21BX/UC ... V**	**C9-E22BX/UC ... V**

"..." Enter the voltage for full type designation

Accessories	
Socket:	**S9-M, S9-L, S9-P, S9-P0**
Optional accessories (blanking plug):	**S9-NP, S9-OP**

Connection diagram



Fig. 1 AC voltage endurance

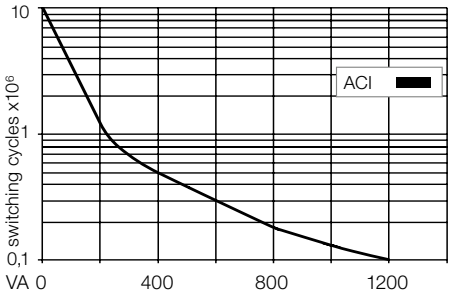

Fig. 2 DC load limit curve

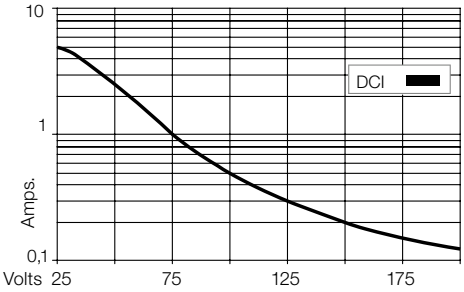

Dimensions [mm]

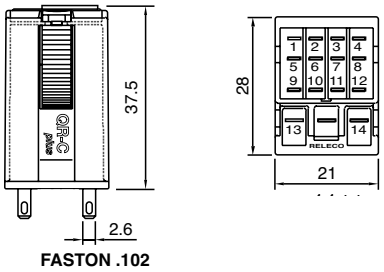

Technical approvals, conformities

cULus cSAus Lloyd's CCC PG

IEC 61810; EN 60947 CE RoHS

This issue replaces all previous issues. Availability, errors and specifications subject to change without notice.

C9-R2x

9-pin, miniature remanence relay, 2-pole, plug-in, faston

Type	**C9-R2x/ ... V** Magnetic latching relay 2 change-over contacts
Maximum contact load	**5 A/120V AC1** **5 A/30 V DC1**
Recommended minimum contact load	**10 mA/10 V**

Contacts

Material	Standard	Code 1	AgNi + 0,2 µ Au
Rated current			5 A
Switch-on current max. (20 ms)			15 A
Switching voltage max.			120V
AC load			600 VA
DC load			see Fig. 2

Coil

Coil resistance	see table; tolerance ± 10 %
ON pulse power	1,2 VA/W
OFF pulse power	0,3 VA/W
1 winding for AC, 2 winding for DC	

Internal Diagram:

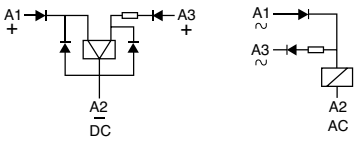

Coil table

VAC	mA ON	mA OFF	VDC	mA ON	mA OFF
24	50	8	12	100	25
48	25	4	24	50	12
115	10	2	48	25	6
230	5	1	60	20	5

Insulation

	Volt rms, 1 min
Contact open	1000 V
Contact/contact	2 kV
Contact/coil	2 kV
Insulation resistance at 500 V	≥1 GΩ
Insulation, IEC 61810-1	2,5 kV/2

Specifications

Ambient temperature operation/storage	-40 (no ice)….60 °C /-40 ... 80 °C
Minimum pulse ON/OFF	50 ms
Mechanical life	AC: 10 Mill./DC: 20 Mill.
DC voltage endurance at rated load	≥100000 switching cycles
Switching frequency at rated load	≤ 1200/h
Protection class	IP40
Weight	43 g

Standard types

AC 50 Hz/60 Hz: 24, 48, 115, (120), 230	**C9-R21/AC ... V**
DC 12, 24, 48, 60	**C9-R21/DC ... V**

"..." Enter the voltage for full type designation

Accessories

Socket:	**S9-M, S9-L, S9-P, S9-P0**
Optional accessories (blanking plug):	**S9-NP, S9-OP**



Connection diagram



Fig. 1 AC voltage endurance

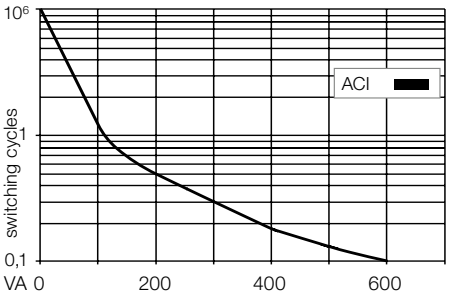

Fig. 2 DC load limit curve

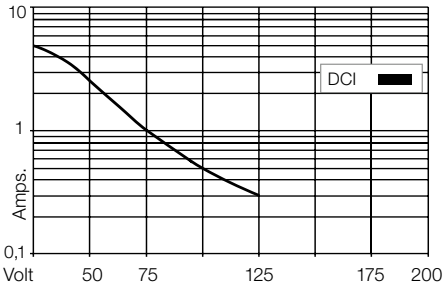

Dimensions [mm]

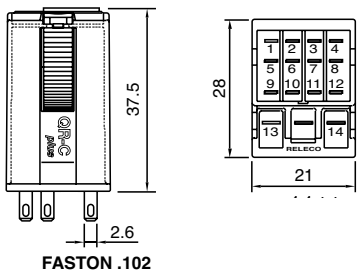

FASTON .102

Technical approvals, conformities

Lloyd´s

IEC 61810; EN 60947