HIRSCHMANN® Test & Measurement
A BRAND OF SKS

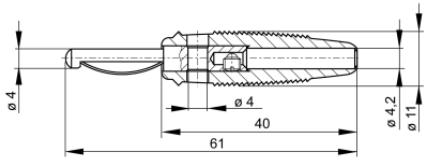
SKS Kontakttechnik GmbH

Plugs

VQ 20



CE

Product	VQ 20
description	Fully mating connector, shatter-proof, flexible insulated sleeve with transverse hole. The tapering sleeve end also serves as kinking protection for the lead. Screw connection up to maximum cable cross-section of 1.5 mm². Nickel-plated brass contact material.
operating instruction	BA410
article-no. / *colour	9300581xx 00 black · 01 red · 02 blue · 03 yellow · 04 green · 07 white Ni
drawing	
	
technical data	
connection	screw terminal
rated voltage(1)	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (3)
rated current(1) (consider derating curve)	16 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010(2)	-25 °C to +70 °C
standard	IEC 61010

4 mm system

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
(3) without rated measurement category, for other circuits that are not directly connected to mains
stand: 07.05.2019