GLX420500

Fourth pole add-on, simultaneous closing operation as switch disconnector poles, IEC/EN. For GL0500C1 version



Product designation		Fourth pole
Product type designation		GLX42
Number of poles	Nr.	1
Operating voltage type		AC

Contact characteristics

IEC Conventional free air thermal current Ith	A	500
Rated insulation voltage Ui IEC/EN	V	1000
Rated impulse withstand voltage Uimp	kV	12

Dimensions

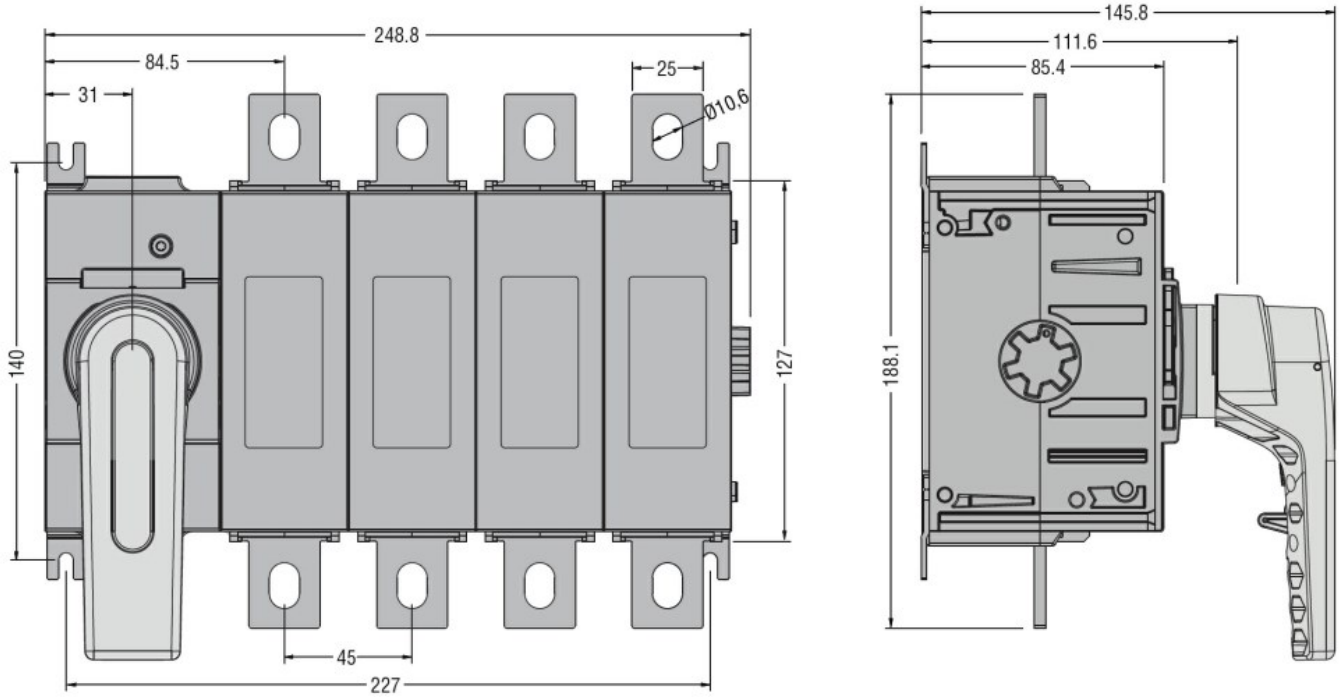

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

IEC/EN 60947-3

ETIM classification

ETIM 8.0	EC002498 - Accessories/spare parts for low-voltage switch technology

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding