HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

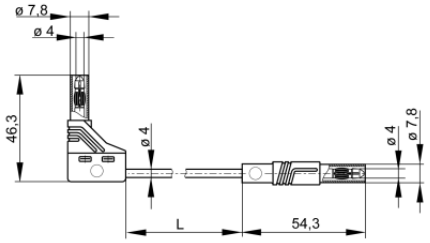
## Measuring leads

# MLS WG 200/1



CE

4 mm safety system

| Product | MLS WG 200/1 |
|---|---|
| description | Safety measuring lead, at either end 4 mm diameter safety connector with straight/rectangular outlet and integrated kink protection. Nickel-plated copper beryllium contact spring. Highly flexible, double insulated stranded lead, shatter-proof grip sleeve and lead. Color indicator for the recognition of damage to the insulation. In accordance to IEC 61010 standard. |
| operating instruction | BA453 |
| article-no. /<br>*colour | 9340841xx<br>00 black · 01 red · 02 blue · 03 yellow · 04 green<br>Ni |
| **drawing** | |
| |  |
| **technical data** | |
| rated voltage | AC/DC 1000 V |
| measurement cat. acc. to IEC 61010 | CAT III |
| rated current<br>(consider derating curve) | 16 A |
| material plug | brass, nickel plated |
| housing material | PA |
| temperature range acc. To IEC61010(1) | -15 °C to +70 °C |
| inflammability class acc. to UL 94<br>(only valid for basic material of housing) | V-2 |
| cable length | 200 cm |

| | |
|---|---|
| conductor size | 1 mm² |
| cable material | PVC |

(1) contact the manufacturer for applications at deviating temperature ranges
stand: 21.06.2022

stand: 21.06.2022