


WISKA COMBI 607



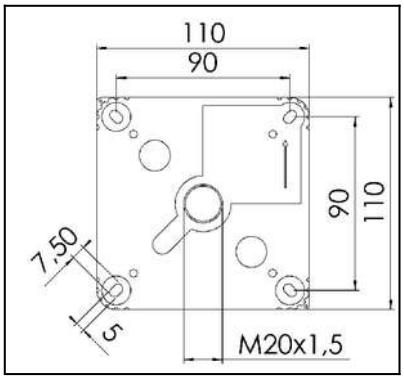

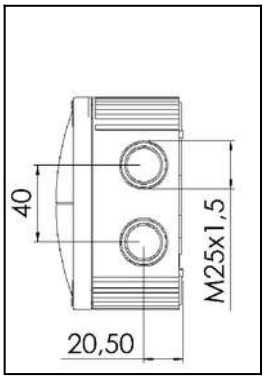

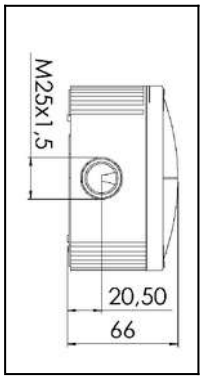

Protection class to EN 60 529:	IP 66 / 67
Flame protection:	Glow wire test 750° C acc. to EN 60695-2-11
Temperature range:	-5°C up to 60°C
Voltage:	690 V
Material:	Polypropylene, reinforced glass fibre; sealing: thermoplastic elastomere
Terminals/poles:	6 mm²
Fixing:	4 internal openings outside of the sealing area
Equipment:	Elastic self-sealing membranes for cable entry without mechanical devices: 7 inlets at the side and 3 inlets in the base - 7 integrated M 25 threads, no locknuts necessary - 4 captive quick-release lid screws - Colour RAL 7035 light grey - .../S = black - .../W = white - .../ESKV incl. 3 pcs. ESKV M 25 (*Sealing range 9 - 17 mm)
Accessories:	- DIN RAIL KIT 607: Rail TS 35 + Fixing material, WISKA-No. 60361

Type	WISKA-No.		mm		L x B x H external / außen mm
COMBI 607/leer	10060531	3/27	3 - 17		110 x 110 x 66
COMBI 607/leer/S	10060648	3/27	3 - 17		110 x 110 x 66
COMBI 607/leer/W	10060533	3/27	3 - 17		110 x 110 x 66
COMBI 607/ESKV	10060529	3/27	3 - 17*		110 x 110 x 66
COMBI 607/5	10060532	3/27	3 - 17		110 x 110 x 66
COMBI 607/5/S	10060538	3/27	3 - 17		110 x 110 x 66
COMBI 607/5/W	10060534	3/27	3 - 17		110 x 110 x 66
DIN RAIL KIT 607	10060361	1		—	-

© 2010 WISKA Hoppmann & Mulsow GmbH
Kisdorfer Weg 28
D-24568 Kaltenkirchen
Phone: +49 (0)4191 / 508-100
Fax: +49 (0)4191 / 508-209