
TEGERA®



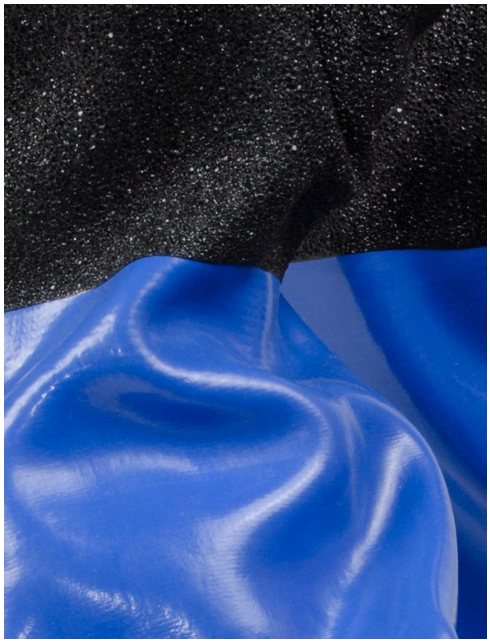

TEGERA® 12945

Learn more

SOFT PVC GLOVE, EXTRA-LONG SLEEVE

Double-dipped PVC chemical protection glove with extra-long sleeve. It withstands contact heat up to 100°C/212°F, offers a good grip in oil, features a knitted lining, is phthalate-free, and has a 0.2 mm/7,8 mil chemical protection layer. Pre-curved fingers, a comfortable and soft design, lead to less hand fatigue and improved work efficiency.

CHARACTERISTICS

- High level of protection
- Durable
- Good grip
- Comfortable
- Good grip in oily environments

FUNCTIONS

- Withstands contact heat up to 100°C
- Extra long
- Waterproof
- Protection against chemicals
- Pre-curved fingers
- Phthalate-free
- Latex-free
- Oil and grease resistant

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF

Heat injuries, corrosive injuries, contact with dirt, contact with chemicals, contact with moisture, contact with damp, contact with oil

PRIMARY ENVIRONMENTS OF USE

Chemical risk environments, microbiological risk environments, environments hazardous to health, corrosive environments, wet environments, moist environments, oily and greasy environments, dirty environments

PRIMARY AREAS OF USE

Building and construction, hvac installation, construction, soil preparation, concrete work, transport work, mining, metalwork, agricultural work, fishing industry work, fishing, marine work, chemical work, petro-chemical work, chemical technology work, paper industry work, decontamination, sanitation

PRIMARY INDUSTRIES OF USE

Agriculture, mining, oil, gas, petrochemical, pulp and paper, chemical, rubber and plastic, metal fabrication, automotive, building and construction

TYPE OF WORK

Heavy weight

CHEMICAL RESISTANCE

According to EN16523-1:2015. For details, please contact Ejendals.

SPECIFICATION

TYPE Chemical protection gloves, Heat protection gloves
CATEGORY Cat. III
THICKNESS 0,2* mm (*chem-layer)
LINING MATERIAL Nylon, Seamless
LENGTH 450 mm
DEXTERITY 5
GRIP DESIGN Granulated
COLOUR Blue, Black
PAIRS PER: BUNDLE/CARTON 12/60
DIPPING MATERIAL PVC (Vinyl)
INNER MATERIAL SPECIFICATION Nylon
OUTER MATERIAL SPECIFICATION Polyvinyl chloride

COMPLIANCE

CE 0598 UKCA 0120 EAC

TP TC 019:2011

Information/UIS

EN ISO 374-1:2016/A1:2018 Type B
KLMPT

EN ISO 374-5:2016
Virus

EN 407:2020 (No flame protection)
X1XXXX

EN 388:2016+A1:2018
4131X

EN ISO 21420:2020

FEATURES

Windproof

Waterproof

Chemical protection

TEST ACCORDING TO EN ISO 374-1:2016

Tested chemical	K	L	M	P	T
Permeation level	6	2	3	6	6
Degradation %	0,4	52,9	61,3	-9,6	26,8

SIZE		ARTICLE NUMBER	EAN
8	M	12945-8	7392626068698
9	L	12945-9	7392626068711
10	XL	12945-10	7392626068650
11	XXL	12945-11	7392626068674

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.