Brückenstecker
- zum Verbinden der beiden Pole unserer Brückenbuchsen mit Steckanschluss Ø 4 mm
- für unsere Brückenbuchse **BRBU 7924 L.. /..**(Farbe)
- den Warnhinweis WH 003 finden Sie unter www.schuetzinger.de


Best.-Nr.
BRST 7922 Ni /..(Farbe)
- Kontaktteile **vernickelt**
- Isolierteil PA 6.6 (Polyamid)
- **Farben** siehe Tabelle

WH 003

Connecting plug
- *for connecting both poles of our connecting sockets with a socket Ø 4 mm*
- *for our connecting socket **BRBU 7924 L.. /..**(colour)*
- *please visit www.schuetzinger.de to find the warning notice WH 003*

Order No.
***BRST 7922 Ni /..**(colour)*
- *contact parts* ***nickel-plated***
- *insulation* *PA 6.6 (Polyamid)*
- ***colours*** *see table*

WH 003

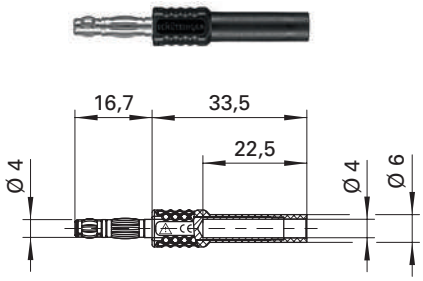

Allgemeine Angaben	
Best.-Nr. [1]	**BRST 7922 Ni /..**(Farbe) Kontaktteile vernickelt
Farben	schwarz, rot
Technische Daten	
Anschluss	Steckbuchse
Durchgangswiderstand	6 mΩ
Bemessungsspannung [2]	30 V_{AC} / 60 V_{DC}
Bemessungsstrom [2]	16 A
Temperatur-Einsatzbereich	von -25 °C bis +80 °C

[1] andere Kontaktoberflächen, Farben und Anschlüsse auf Anfrage
[2] bei normalen Umgebungstemperaturen

General information	
Order No. [1]	***BRST 7922 Ni /..**(colour)* *contact parts nickel-plated*
colours	*black, red*
Technical data	
terminal	*inline socket*
transition resistance	*6 mΩ*
rated voltage [2]	*30 V_{AC} / 60 V_{DC}*
rated current [2]	*16 A*
operating temperature	*from -25 °C to +80 °C*

[1] *other contact platings, colours and terminals on request*
[2] *at normal ambient temperatures*