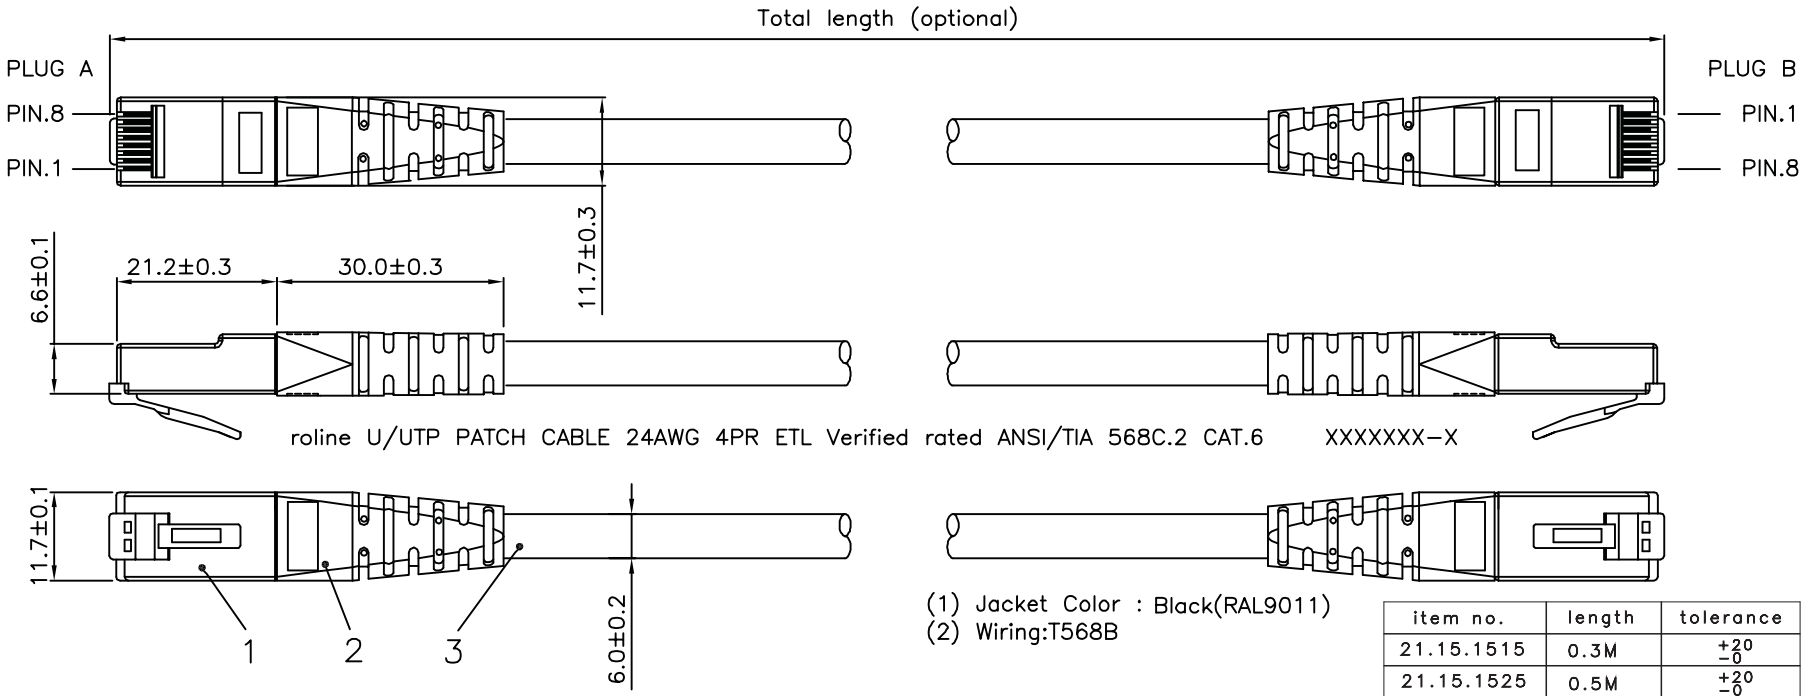

(1) Jacket Color : Black(RAL9011)
(2) Wiring:T568B

item no.	length	tolerance
21.15.1515	0.3M	+20 −0
21.15.1525	0.5M	+20 −0
21.15.1535	1M	+20 −0
21.15.0928	1.5M	+20 −0
21.15.1545	2M	+20 −10
21.15.1555	3M	+20 −10
21.15.1565	5M	+30 −20
21.15.1575	7M	+30 −20
21.15.1585	10M	+30 −20
21.15.1595	15M	+30 −20
21.15.1605	20M	+70 −30

Specification :

Material :
1. RJ45 Plug :
   1-1. Housing : Polycarbonate, Transparent color.
   1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
   1-3. Contact finished : Min. 50 micro-inch Gold plated.
2. Molding: PVC.
3. Cable :
   3-1. Jacket : PVC.
   3-2. Conductor : 24 AWG stranded copper.
   3-3. Isolation : PE.
   3-4. Isolation Cross Bar for 4 pairs : PE.
4. Cable structure : U/UTP, 4 twisted pair with Cross Bar.
5. Minimum Bending Radius: 50mm

item no	21.15.1515	21.15.1525	21.15.1535	21.15.0928	21.15.1545
21.15.1555	21.15.1565	21.15.1575	21.15.1585	21.15.1595	21.15.1605
Desc	ROLINE Cat 6 U/UTP Patch Cord,Black				

"#": Matching DIM.
"*": Important DIM.
Others General DIM.

GENERAL TOLERANCE OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

DRAWING	23.JuL.2016	byz	
CHECK	23.JuL.2016	Jane	
APPROVAL	23.JuL.2016	Jaimy	
	DATE	NAME	
SCALE	1/1 (A4)	UNIT	mm

SECOMP

DRAWING NO.
DRAWING CLASSIFICATION S SHEET 1 OF 1
A1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

0 10cm