SPRINGFIT™ 400 SERIES

ACTIVATED CARBON LAYER IS INCORPORATED TO REMOVE NUISANCE ODOURS

TECHNICAL SPECIFICATION

RESPIRATORY PROTECTION

INSTRUCTIONS FOR USE

- Mask must be fitted in accordance with the instructions supplied
- Care must be taken to ensure that the correct mask type is selected for the work to be carried out
- If in doubt as to the type of mask required seek professional guidance


PERFORMANCE

- Springfit™421 and 425 offer an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) for fine dusts, fibres, fumes, and mists
- Springfit™ 431, 435 and 436 offer an APF of 20 x WEL for fine dusts, fibres, fumes, and mists
- Respiratory protection is only effective if it is correctly selected, fitted and worn throughout the time when the wearer is exposed to respiratory contaminants

MAN MADE FIBRES:
The mask has an ergonomic 3D design to fit most face shapes



POLYPROYLENE INNER SKELETON:
Ensures good seal by absorbing facial movements

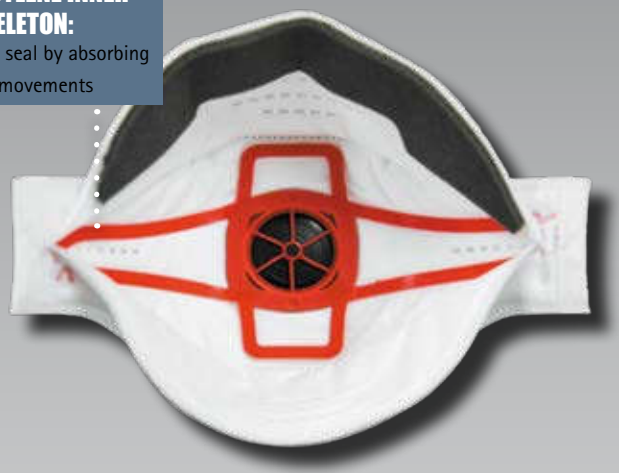

SPRINGFIT™ OPTIONS

Springfit™ Model	EN 149 Classification	Typhoon™ Valve	Carbon Filter
421	FFP2 NR D	No	No
425	FFP2 NR D	Yes	No
431	FFP3 NR D	No	No
435	FFP3 NR D	Yes	No
436	FFP3 NR D	Yes	Yes

SPRINGFIT™ FEATURES

- **Face Seal:** Improved face seal for added comfort
- **Typhoon™ Valve:** Optional Modern design valve allows for lower breathing resistance
- **Carbon Filter:** The Springfit™436 has an integrated Carbon filter to help reduce nuisance odours

CLEANING & MAINTENANCE

- Not applicable - disposable product
- Store the masks out of sunlight away from chemicals in a dry atmosphere

CONFORMITY & MARKINGS

- Meets the FFP2 and FFP3 requirements of EN149 (as applicable)
- EU Type Examination Certificate Number 682743
- EN149:2001 + A1:2009

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com .

SPRINGFIT™ 400 SERIES


ACTIVATED CARBON LAYER IS INCORPORATED TO REMOVE NUISANCE ODOURS

TECHNICAL SPECIFICATION

RESPIRATORY PROTECTION


SPRINGFIT ™ 421, 431 DIMENSIONS OF INNER PACKAGING

Box Quantity: 10

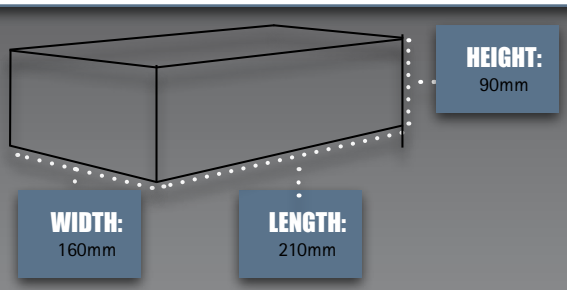


SPRINGFIT™ 425, 435, 436 DIMENSIONS OF INNER PACKAGING

Box Quantity: 10

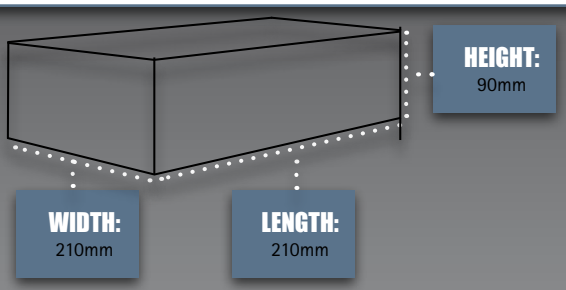


SPRINGFIT ™ 421, 431 DIMENSIONS OF OUTER PACKAGING

Box Quantity: 100

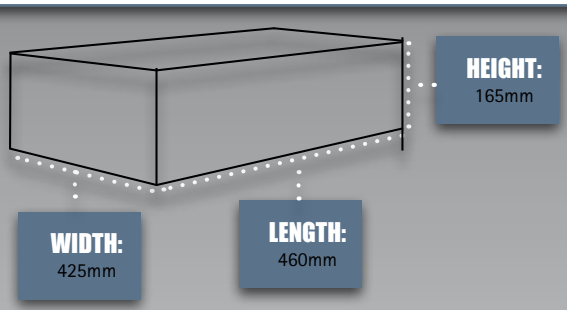

SPRINGFIT™ 425, 435, 436 DIMENSIONS OF OUTER PACKAGING

Box Quantity: 100

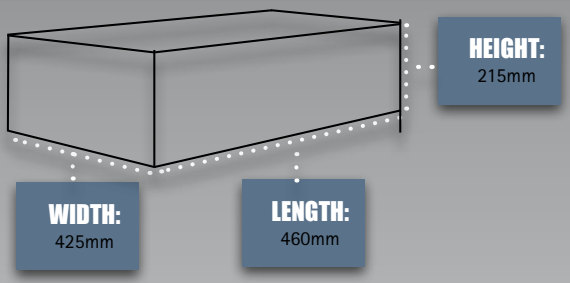

LIMITATIONS OF USE

- Protection will only be offered if the mask is fitted correctly
- The mask, when in contact with the skin may cause allergic reactions to susceptible individuals
- If this occurs leave the hazard area, remove mask and seek medical advice
- The use by date is printed on the outer packaging
- Do not use where exposure to chemical gases may be experienced
- Use in well ventillated areas only, which are not deficient in oxygen and do not contain explosive atmospheres
- Ensure good seal around the face is created before entering the hazard area
- The working life of the mask is nominally one day (this is based on an working day shift of 8 hours), however it may be affected by many factors, including work rate, airflow and concentration of any contaminent in the atmosphere. The mask should be changed immediately if,
  a.) Breathing difficulties due to clogging are experienced,
  b.) Breakthrough of a contaminent is detected by smell, taste or any other means, or
  c.) The mask becomes damaged
- This mask is not designed to be worn by people with facial hair

DIMENSIONS OF SPRINGFIT™ 421, 431

- Depth: 60mm
- Width: 210mm
- Height: 125mm
- Weight: 13.5g (Approx)

DIMENSIONS OF SPRINGFIT™ 425, 435, 436

- Depth: 70mm
- Width: 210mm
- Height: 125mm
- Weight: 18.8g (Approx)

SPRINGFIT™

DISCLAIMER: Information presented within this technical specification was correct on date of issue. Information may be subject to change without notice as part of ongoing product improvement and development. To confirm any specific piece of information shown is current please email technical@jspsafety.com .