stay connected

MOSA M12 FEMALE 90° 3LED FIELD-WIREABLE (IDC)


4-pol. 0.25…0.5mm²

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration




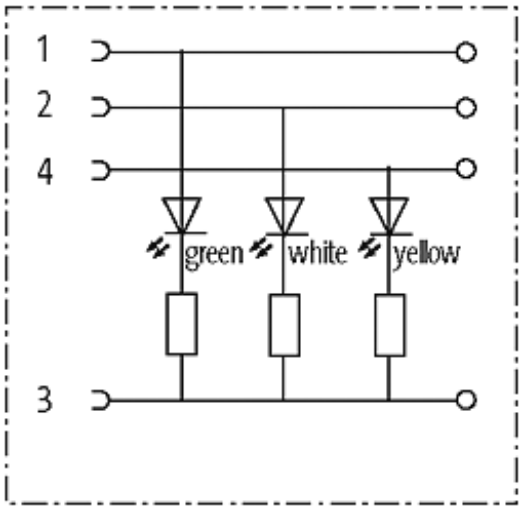


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

MURR ELEKTRONIK
stay connected

Female

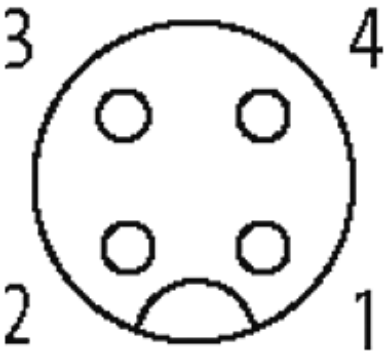

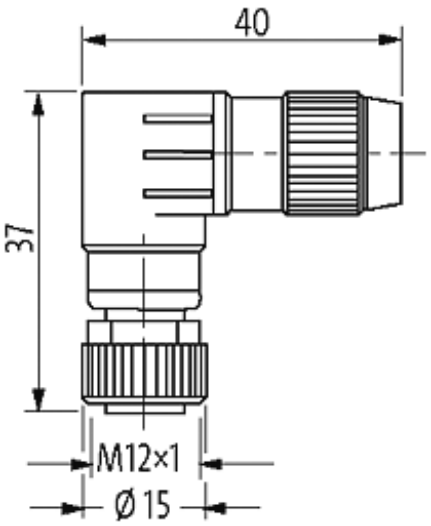

Product may differ from Image

Form	
Form	12691
Technical Data	
Operating voltage	24 V DC ±25%
Operating current per contact	max. 4 A
Connection cross section	0.25...0.5 mm² (conductor diameter min. 0.1 mm)
Sealing range (cable Ø)	4...5.1 mm
Wire isolation	PVC, PP, TPE
Outer wire Ø	1.2...1.6 mm
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
General data	
Temperature range	-25...+85 °C
Dimensions H × W × D	37×40×15 mm

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879201674
eClass	27279221
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17