stay connected

## M12 female 0° T-coded field-wireable

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

## Link to Product

### Illustration



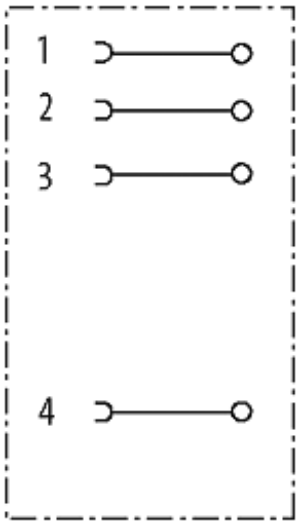


The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

MURR ELEKTRONIK
stay connected

Female

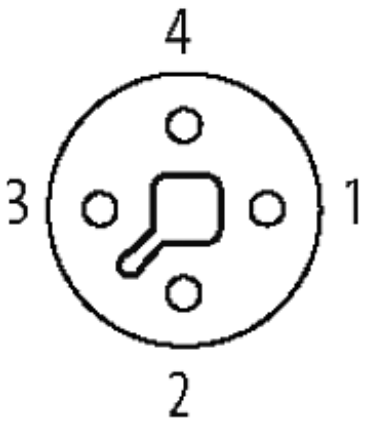


Product may differ from Image

| | |
|---|---|
| **Form** | |
| Form | P7411 |
| **Technical Data** | |
| Operating voltage | max. 63 V AC/DC |
| Rated surge voltage | 1.5 kV |
| Operating current per contact | max. 12 A |
| Material group | IEC 60664-1, category III |
| Connection cross section | max. 1.5 mm² |
| Coding | T-coded |
| Sealing range (cable Ø) | 8...10 mm |
| Locking of ports | Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing |
| Protection | IP67 inserted and tightened (EN 60529) |
| Material | PA |
| suitable for corrugated tube (internal Ø) | without |
| Compression gland | M12 (SW18) |
| **General data** | |
| Pollution Degree | 3 |
| Dimensions H × W × D | 58×20×20 mm |
| Temperature range | -40...+85 °C |
| Material (gasket) | FKM |
| **Commercial data** | |
| country of origin | DE |
| customs tariff number | 85366990 |
| EAN | 4048879653855 |
| eClass | 27279221 |
| minimum order quantity | 1 |

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17