
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	RELEASED FOR PRODUCTION	11/01/01	MCCORMICK
B	ECN 3112: UPDATE DWG FORMAT	12/13/07	D.GRIFFIN

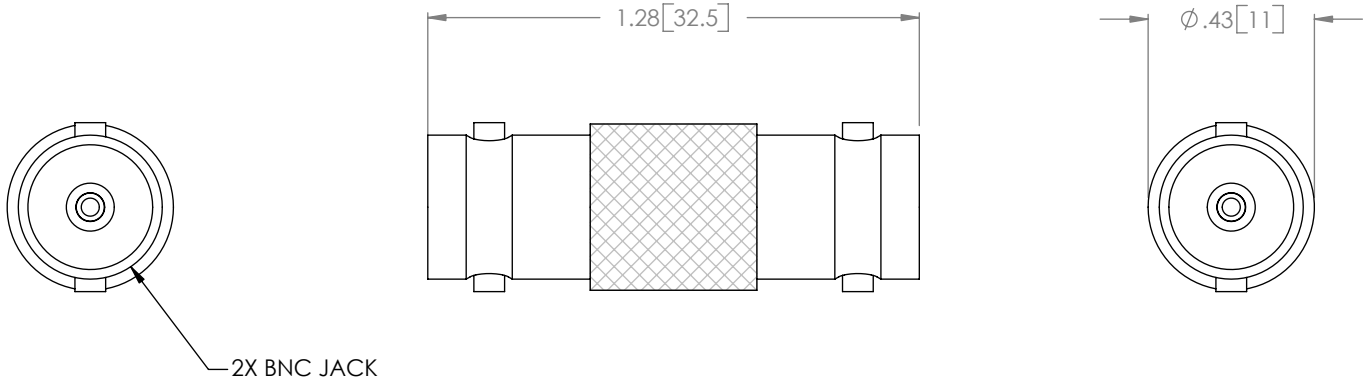

NOTES:

MATERIAL:
CONNECTOR BODY IS NICKEL PLATED BRASS
CENTER CONTACTS ARE GOLD PLATED.
INSULATION IS DELRIN

IMPEDANCE: 75 OHM

RoHS Compliant ✔

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
TOLERANCES TO BE:
.X ±.1 [2.5] ANGLES ±2°
.XX ±.01 [.25]
.XXX ±.005 [.13]

OVERALL CABLE LENGTH TOL:
≤ 60 [1524] +3 [76.2] / - 0
> 60 [1524] +5% / -0%

PROJ

APPROVALS	DATE
DRAWN BY MCCORMICK	11/01/01
CHECKED BY ENG	11/01/01
APPROVED BY D.PARHAM	11/01/01

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

L-com CONNECTIVITY PRODUCTS
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
COAXIAL

PRODUCT DESCRIPTION
ADAPTOR 75 OHM BNC F/BNC F

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	BA016	B

SCALE: NONE | CAD FILE: BA016.SLDDRW | SHEET 1 OF 1