RELECO by TURCK

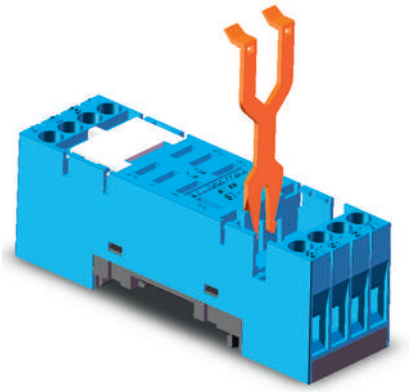

S7-C

Two pole, one level
Integrated clip and marking labels

10 A

Socket for QRC, 2-Pole Plug-In Relay Types C7-A20, C7-T21, C7-G20, C7-X10, C7-W10

- DIN rail or panel mountable
- Removable labels
- EN/DIN and sequencial numbering
- Bridge bar connection in A2

Wiring Diagram

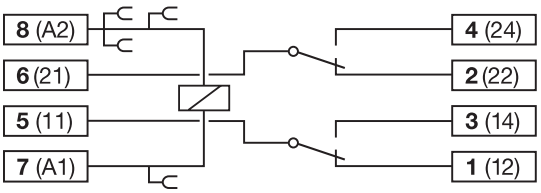

Dimensions - mm

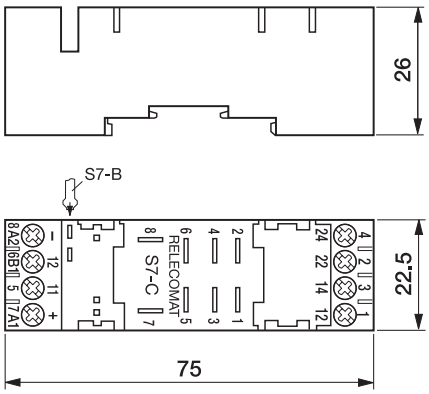

Specifications

Nominal Load:	10 A
Insulation:	
Dielectric strength, 1 minute	
Between contacts and coil	2.5 KV
Between all terminals and rail DIN	2.5 KV
Between adjacent poles	2.5 KV
Wire In-Lets Capacity:	
Solid wire	4 mm² or 2 x 1.5 mm²
Multi-core	16, 18 AWG
Ferrule tip terminals	4 mm²
Max. screw torque	1. 2 Nm
Screw dimensions	M3, Pozi
Integrated hold-down clip	
2 Removable marking labels	

Lloyd´s