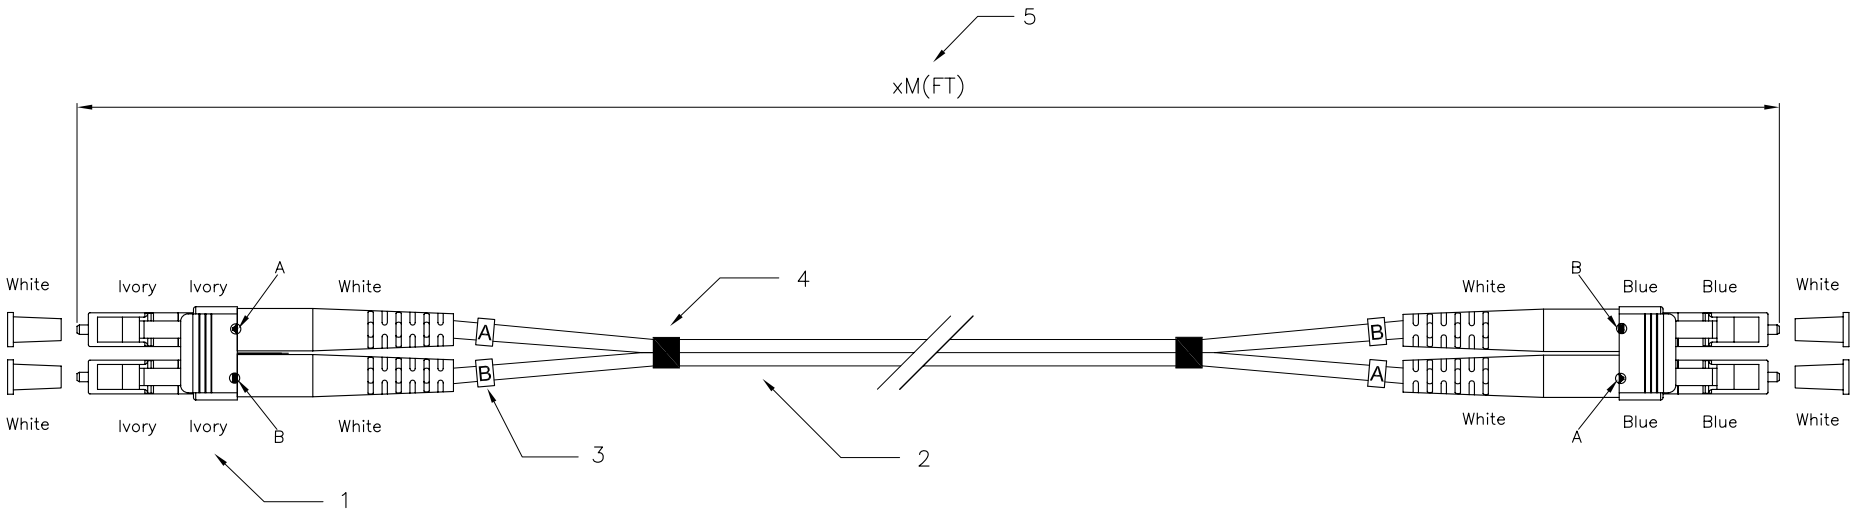

Specification:

1. Connector Type : LC Multimode
2. Cable Type :
   2-1 Zipcord Cable, ø2.0mm, 50/125um Multimode.(OM3 Corning Fiber)
   2-2 Calbe Jacket : Aqua Color, PVC Material.
3. Cable Marker
4. Shrink Tube
5. Length : xM(FT)

Performance:

a. Insertion Loss : <0.5 dB
b. Fiber Extention : −0.05um < H < +0.05um
c. ø1.25mm Ferrule End-face Radius : 7 < R < 25mm
d. Apex Offset : < 50um
e. Increase in insertion loss after 500 mating : 0.2 dB Max
f. Operating Temperature : −20° to +70°
g. Storage Temperature : −40° to +80°

Remack#

21.15.8700	MultiMode, LC-LC,50/125 um	0.5M
21.15.8701	MultiMode, LC-LC,50/125 um	1M
21.15.8702	MultiMode, LC-LC,50/125 um	2M
21.15.8703	MultiMode, LC-LC,50/125 um	3M
21.15.8705	MultiMode, LC-LC,50/125 um	5M
21.15.8708	MultiMode, LC-LC,50/125 um	10M

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	07.JAN.2011	Abby	**Rotronic Co.,LTd.**
	CHECK	07.JAN.2011	MAER	
	APPROVAL	07.JAN.2011	YTY	
		DATE	NAME	ITEM NO.: 21.15.XXXX 有吊卡
	SCALE 1/1 (A4)	UNIT	mm	DES.: LC to LC Duplex patch cord
	DRAWING NO.	SFNIE503131xxxx03001(SA1)		A1
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1	