MURR ELEKTRONIK
stay connected

SVS ECO LED VALVE PLUG FORM C 8MM LED VDR 24V

2+PE field-wireable M12

Form C (8 mm)
24 V AC/DC ±15%
LED and VDR
metric
Field wireable (screw terminals)

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product


Illustration

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20


MURR ELEKTRONIK
stay connected



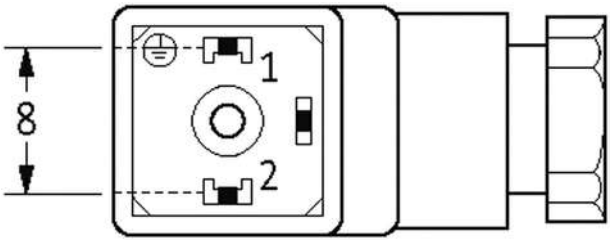

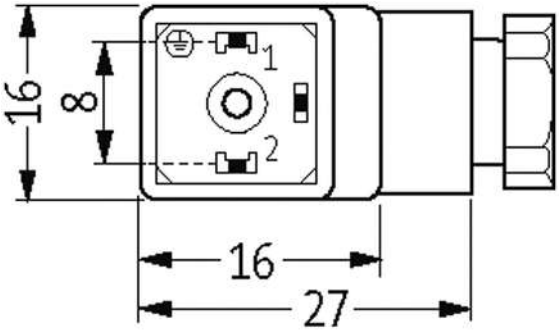

Height: 26 mm

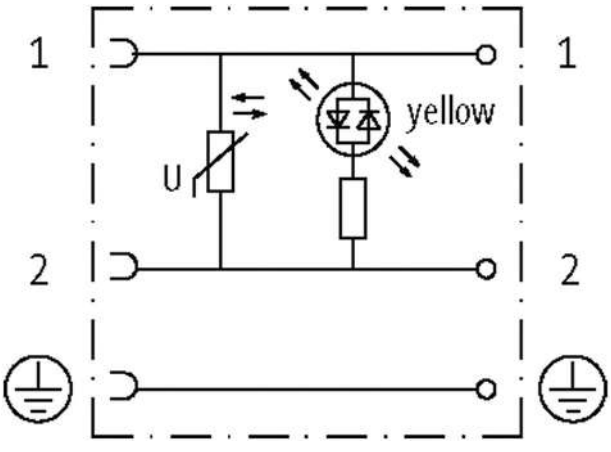

Product may differ from Image

Approvals

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20

EAC | ChinaRoHS25

Form	
Form	30105
Technical Data	
Operating voltage	24 V AC/DC ±15%
Operating current per contact	max. 1.5 A
Configuration	2 contacts + PE
Connection cross section	max. 0.5 mm²
Sealing range (cable Ø)	4...6 mm
LED display	yellow
Locking of ports	M2.5 (recommended torque 0.4 Nm)
Compression gland	M12×1.5 mm
Contact figure	Cable outlet can be turned in 90° steps
Protection	IP65 inserted and tightened (EN 60529)
Additional suppressor	VDR
General data	
Temperature range	-40...+90 °C
Material (gasket)	NBR
Mounting method	inserted, tightened
Commercial data	
country of origin	HU
customs tariff number	85366990
EAN	4048879187008
eClass	27279221
Packaging unit	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/20