HR5XS21S

Socket for relay for fitting on DIN rail or screws, spring terminals



Product designation		SOCKET
Product type designation		HR5X

Contact characteristics

Rated insulation voltage Ui IEC/EN	V	250
Rated impulse withstand voltage Uimp	kV	4

Mechanical features

Fixing		On 35mm DIN rail

Dimensions



A: 60mm (2.36") with HR3X88
70mm (2.75") with XR5X88

Wiring diagrams

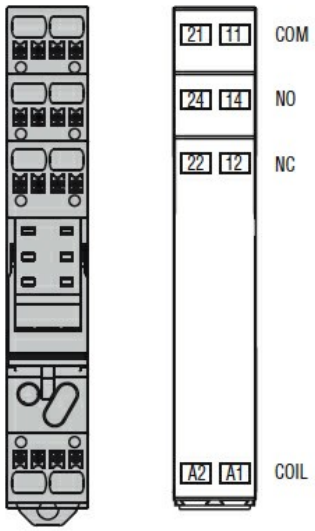

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

EAC

ETIM classification

ETIM 8.0	EC001456 - Relay socket

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding