
maxpower 100 W, single



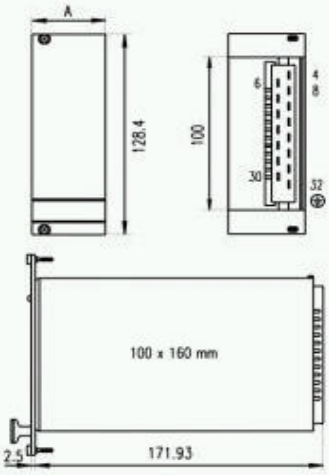

Connector pin-out

Pin	Connection
4	Output + V_1
6	Output + V_1
8	Sense line + V_1
10	Sense line 0 V_1
12	Output 0 V_1
14	Output 0 V_1
16	–
18	–
20	–
22	CSB
24	Output OK
26	–
28	L
30	N
32	PE ⏚

Product illustrations are exemplary illustrations and can deviate from supplied products.

Part no.: 13100-105

Features:

Add to basket

- Wide input voltage range 90 ... 254 VAC and 100 ... 360 VDC with active power factor correction (PFC)
- High power density
- Single output voltage
- Integrated decoupling diode for redundancy operation
- Active current share bus (CSB)
- Signalling: Output voltage OK

Technical Information:

Voltage	Current	Power	Width A	Description
24 V	4.2 A	101 W	6 HP	MAX 124

Downloads:

User Manual/data sheet (**Log in** required)
How is the current share bus (CSB) connected?
How does the signal "output o.k." work?
Conformity confirmation (D/E/F) (**Log in** required)
UL (**Log in** required)
CB-Test Certificate (**Log in** required)
2. Place Product of the Year 2002 (**Log in** required)

To gain access to the additional information you must log in.
If you do not yet have a user name, you may register here.

Delivery comprises:

Qty	Description
1	19" compatible power supply height 3 U width A: 6 HP depth 171.93 mm (160 mm board depth) connector H 15 M coding strip (fitted)

Accessories:

Part no.	Description	
21101-705	Stainless steel EMC gasket 3 U, 97 mm, stainless steel, two pieces necessary per front panel, PU 10 pieces	Add to basket
21006-943	Front panel 6 HP, Al, front anodised, rear iridescent green chromated, with vertical grooves for EMC gaskets, incl. assembly kit, 1 piece	Add to basket
69001-733	Connector H 15 F FASTON connection, 1 piece	Add to basket
60800-123	Coding PU (1 keying/coding strip, 2 pieces keying/coding pins)	Add to basket

Note:

- Output data at mains voltage > 190 VAC, Ta = 0 ...50 °C
- 24 V / 4,2 A