
# SLB4-F





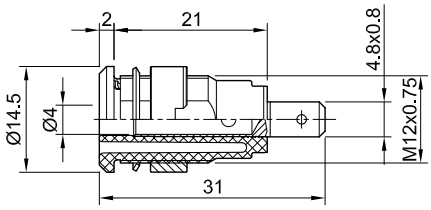


## Item number 23.3000-*

Insulated, rigid, Ø 4 mm, accepting spring-loaded Ø 4 mm plugs with rigid insulating sleeve. Machined brass. Insulation material UL94 V-0. The socket is screwed into pre-drilled panels of plastic, metal, etc. Flat connecting tab 4.8 mm × 0.8 mm.

| Technical data | |
|---|---|
| Diameter of plug system | 4 mm |
| Rated Values | 1000 V, CAT III, 24 A / 600 V, CAT IV, 24 A |
| Surface treatment electrical contact | Au |
| Base material electrical contact | CuZn |
| Standard color(s) * | 20 21 22 23 24 25 26 27 28 29 |
| Test accessory acc. to | IEC EN 61010-2-030 |
| Supplied assembly material | MUR/M12x0,75; SSP4 |
| Remarks | Accessories: Flat connecting receptacle FSH4,8x0,8; Tube spanner SS2; Tube spanner SS425 |
| Approvals | UR |

Staubli is a trademark of Stäubli International AG, registered in Switzerland and other countries. We reserve the right to modify product specifications without prior notice. © Stäubli 2022 | ec.marcom@staubli.com | Photo credits: Stäubli | **www.staubli.com**