M12 MALE 0° SHIELDED WIREABLE SCREW TERM.

5-pol. max.0,75mm² 6-8mm

Link to Product

Illustration



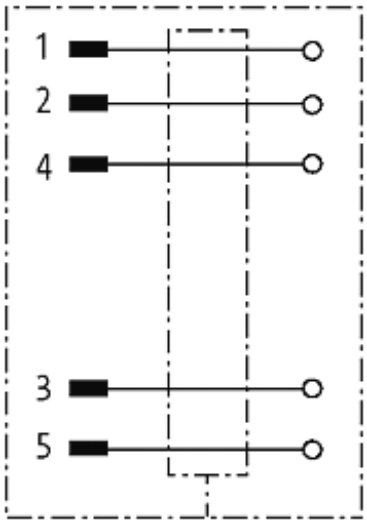

Male

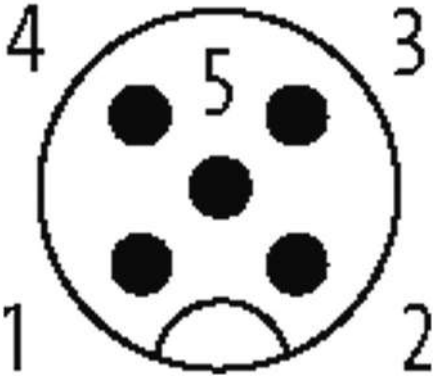

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

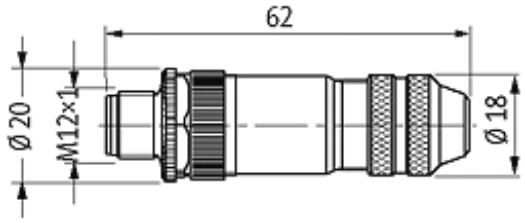

Product may differ from Image

Form	
Form	13321
Technical Data	
Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated
General data	
Temperature range	-25...+85 °C
Commercial data	
country of origin	DE
customs tariff number	85366990
EAN	4048879198837
eClass	27279218
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com