


SLS 200 schwarz/black

Measuring and Testing Equipment:Plugs:4 mm sliding sleeve system

Product description	
Description	Banana plug, touch-protected, with capability of further connection, with solder connection for cross-sections up to 2.5 mm², insulated by latching and sprung insulating sleeve which is only released by pressure on the side-mounted locking spring. 4 mm diameter.
Type	SLS 200 schwarz/black
Order No.	932 153-100
System	4 mm sliding sleeve system
Housing Color	black
Other standard types	red color, order no. 932 153-101

Drawing

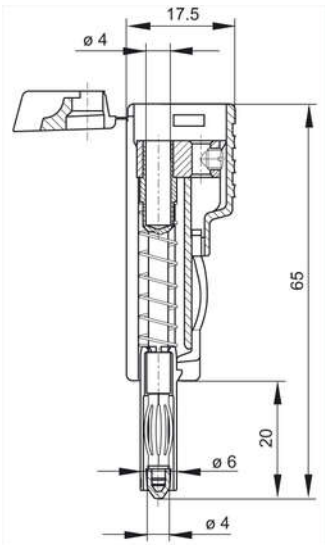

Technical data	
Pin dimensions	4 mm with laminated spring
Type of contact	pin (spring loaded), socket
Type of termination	screw
Rated voltage	DC 300 V
Rated current	30 A
Contact resistance	5 mOhm
Material	
Contact material	copper beryllium
Contact surface material	nickel-plated
Housing material	PP
Environmental conditions	
Temperature range	-25 °C to +80 °C
Inflammability class	