
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 4234: REVISED HEIGHT AND WIDTH DIMENSIONS	9/2/09	D.FRISIELLO
F	ECN 9404: UPDATE DIMENSIONS	9/7/18	S.LI

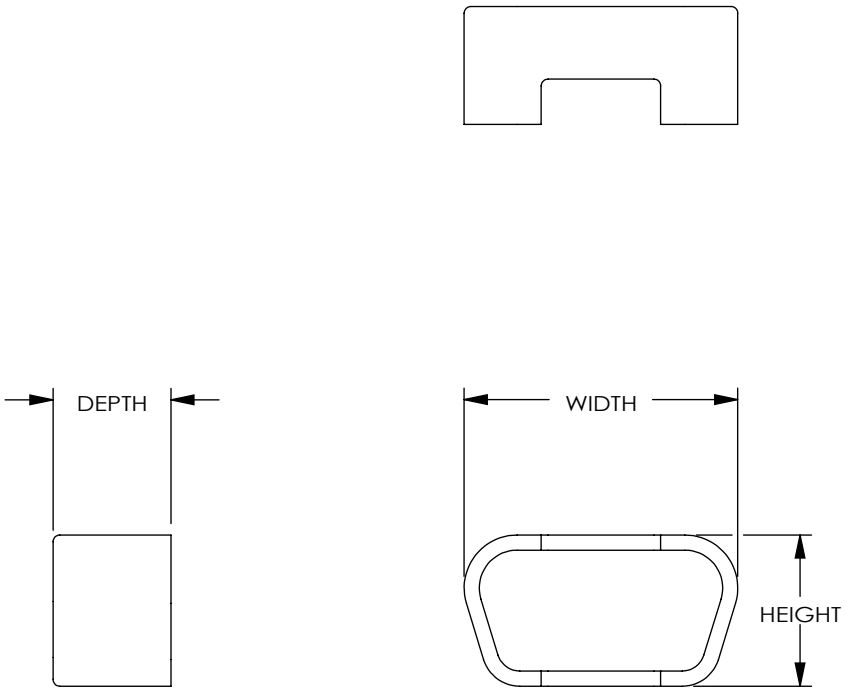

P/N	HEIGHT		WIDTH		DEPTH	
	INCH	MM	INCH	MM	INCH	MM
F CVR9F	.42	10.6	.73	18.6	.30	7.6
F CVR9M	.46	11.7	.80	20.3	.30	7.6
F CVR15F	.40	10.2	1.05	26.7	.30	7.6
F CVR15M	.44	11.2	1.11	28.1	.30	7.6
F CVR25F	.40	10.2	1.58	40.2	.30	7.6
F CVR25M	.45	11.5	1.65	42.0	.30	7.6
CVR37F	.38	9.7	2.24	56.9	.30	7.6
CVR37M	.44	11.2	2.30	58.4	.30	7.6
F CVR50F	.50	12.7	2.13	54.1	.33	8.5
F CVR50M	.55	14.0	2.21	56.1	.33	8.5

NOTES

1. MATERIAL: PVC, BLACK

2. PACKAGE TEN (10) PIECES PER BAG

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS	DATE
DRAWN BY J. KIEZULAS	7/1/2005
CHECKED BY C. McCORMICK	7/1/2005
APPROVED BY R. CARRICK	7/1/2005

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
50 HIGH STREET
NORTH ANDOVER, MA
01845

CATEGORY
DATA CABLING

PRODUCT DESCRIPTION
D SUBMINIATURE DUST COVER

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	CVR9F	F

SCALE: NONE | CAD FILE: CVR9F.SLDDRW | SHEET 1 OF 1