


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 7195: REVISE 3D MODEL TO VENDOR, ROHS, FORMAT	12/12/13	D.FRISIELLO




"J1"
5 PIN FEMALE
HOUSING
(.100" [2.54mm]
SPACING)
FLAME RETARDANT
THERMOPLASTIC, BLACK

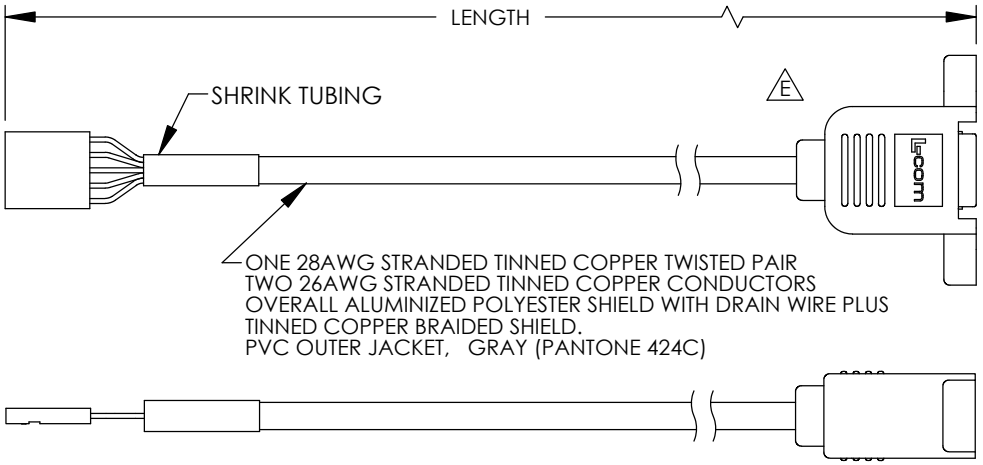

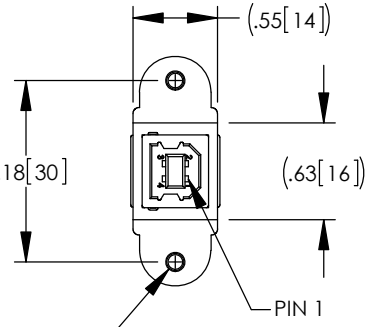


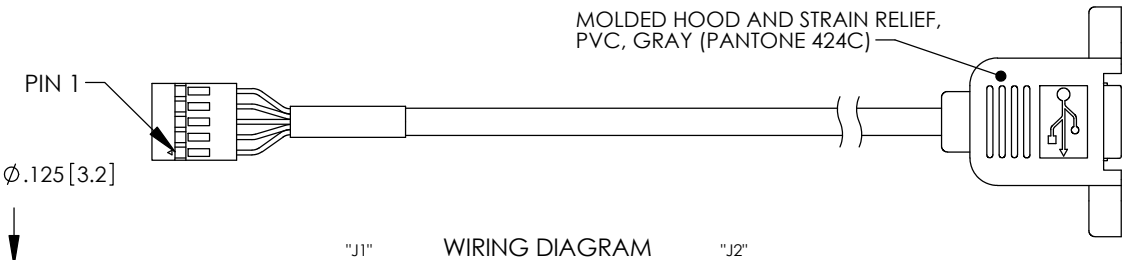

"J2"
USB SERIES "B" RECEPTACLE
PANEL MOUNT
CONTACTS: 30 µINCHES
GOLD PLATING

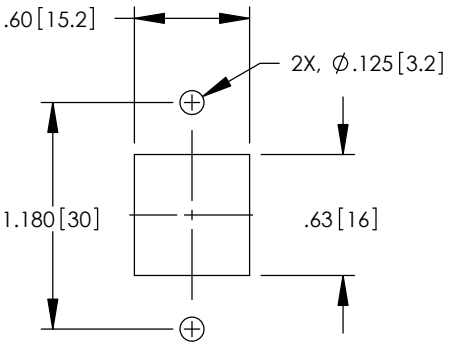

RECOMMENDED
PANEL CUTOUT

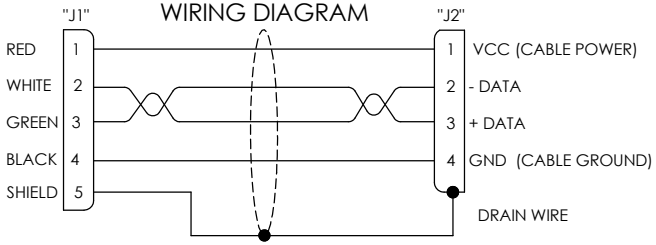

MODEL NUMBER	LENGTH METERS [FEET]
UPMB5-03M	0.3 [.98]
UPMB5-05M	0.5 [1.64]
UPMB5-075M	0.75 [2.46]
UPMB5-1M	1.0 [3.28]
UPMB5-2M	2.0 [6.56]
UPMB5-3M	3.0 [9.84]

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. MOUNTING HARDWARE INCLUDED: 2X #4-40 X .38 LG. PHILLIPS HD SCREW
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5.08]
.XX = ± .02 [.51]
.XXX = ±.005 [.13]
PROJECTION

APPROVALS		DATE
DRAWN BY	D. PARHAM	01/04/2010
CHECKED BY	D. CASTRO	01/12/2010
APPROVED BY	S. SMITH	01/13/2010

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
USB

PRODUCT DESCRIPTION
CA USB-B PNL/5 POS

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	UPMB5	E

SCALE: NONE | CAD FILE: UPMB5.SLDDRW | SHEET 1 OF 1