indicator complete for flush mounting



essential accessories:

lens plastic for flush mounting → 61.18

front bezel-set for flush mounting – 61.20

filament lamp → 61.26; LED → 61.27


	connection method	part no.	circuit drawing	technical drawing	mounting dimension	[kg]
indicator complete for flush mounting	ST/PT	**61-0000.02**	1	8	3	0,006

connection method: ST/PT = soldering-/plug-in terminal

marking page 61.47

technical drawing see page 61.36, mounting dimensions see page 61.39, circuit drawing see page 61.44

indicator-/flusher-actuator for flush mounting







essential accessories:

lens plastic for flush mounting → 61.18

front bezel-set for flush mounting → 61.20

filament lamp → 61.26; LED → 61.27

lamp element → 61.22; diode element → 61.22; flasher element → 61.25

	part no.	circuit drawing	technical drawing	mounting dimension	[kg]
indicator-/flusher-actuator for flush mounting	**61-0009.0**	1	9	3	0,005

marking see page 61.47

technical drawing see page 61.37, mounting dimensions see page 61.39, circuit drawing see page 61.44

lens plastic for flush mounting

	shape	lens/support	colour	24 x 30 mm part no.	24 x 24 mm part no.	25 mm dia. part no.	
lens plastic for flush mounting matt	flat	transparent/translucent	blue	**61-9681.6**	**61-9671.6**	**61-9642.6**	0,001
			colourless, clear	**61-9681.7**			0,001
						61-9642.7	j
					61-9671.7		0,001
			green	**61-9681.5**	**61-9671.5**	**61-9642.5**	0,001
			orange			**61-9642.3**	0,001
			red	**61-9681.2**	**61-9671.2**	**61-9642.2**	0,001
			smoked			**61-9642.1**	0,001
			yellow	**61-9681.4**	**61-9671.4**	**61-9642.4**	0,001
matt (not for film insert and LED)	flat	translucent/translucent	white	**61-9281.9**	**61-9271.9**		0,001
matt (not for film insert and illumination)	flat	opaque/translucent	black	**61-9781.0**	**61-9771.0**		0,001
			grey	**61-9781.8**	**61-9771.8**		0,001



lens metal with window

	shape	lens	colour	25 mm dia. part no.	
lens metal with window matt	flat	aluminium anodized	natural	**61-9841.8A**	0,002



lens metal

	shape	lens	colour	25 mm dia. part no.	
lens metal matt	flat	aluminium anodized	black	**61-9841.0**	0,002
			blue	**61-9841.6**	0,002
			green	**61-9841.5**	0,002
			natural	**61-9841.8**	0,002
			red	**61-9841.2**	0,002
			yellow	**61-9841.4**	0,002



mushroom-head cap

	mushroom	colour	32 mm dia. part no.	
mushroom-head cap plastic	opaque	black	**61-9593.0**	0,004
		green	**61-9593.5**	0,004
		red	**61-9593.2**	0,004
		yellow	**61-9593.4**	0,004



keylock front bezel

for standard lock 311, other lock numbers on request

	18 x 24 mm part no.	24 x 24 mm part no.	18 mm dia. part no.	18 x 18 mm part no.	
keylock actuator	**61-9230.0**	**61-9250.0**	**61-9210.0**	**61-9220.0**	

front bezel-set for flush mounting

	use	material	colour	24 x 30 mm part no.	24 x 24 mm part no.	25 mm dia. part no.	kg
front bezel-set for flush mounting	keylock/ selector	aluminium anodized	black			**61-9932.1**	0,006
						61-9932.1	0,007
			natural			**61-9932.0**	0,007
						61-9932.0	0,006
	selector	plastic			**61-9936.0**	**61-9932.10**	0,007
	keylock		aluminium platted	**61-9931.4**	**61-9930.4**		0,007
			black	**61-9931.0**	**61-9930.0**	**61-9932.10**	0,007
	illuminated pushbutton/ indicator	aluminium anodized	black			**61-9933.1**	0,006
			natural			**61-9933.0**	0,006
		plastic	aluminium platted	**61-9931.4**	**61-9930.4**		0,007
			black	**61-9931.0**	**61-9930.0**	**61-9933.10**	0,007



front ring

for actuator 24 mm dia.

	material	colour	part no.	kg
front ring	aluminium anodized	black	**61-9600.0**	0,003
		natural	**61-9600.1**	0,003



protective front ring

for actuator 24 mm dia.

	material	colour	part no.	kg
protective front ring with silicone membrane	aluminium anodized	black	**61-9926.0**	0,004


protective cover

	front dimension pushbutton	part no.	technica drawing	kg
protective cover hinged, transparent, with means for sealing		**61-925**	15	0,005
		61-9920.0	16	0,006
		51-920	14	0,005




technical drawing see page 61.38

6 keylock switch actuator 2 positions, keylock switch actuator 3 positions
page 61.7, 61.8

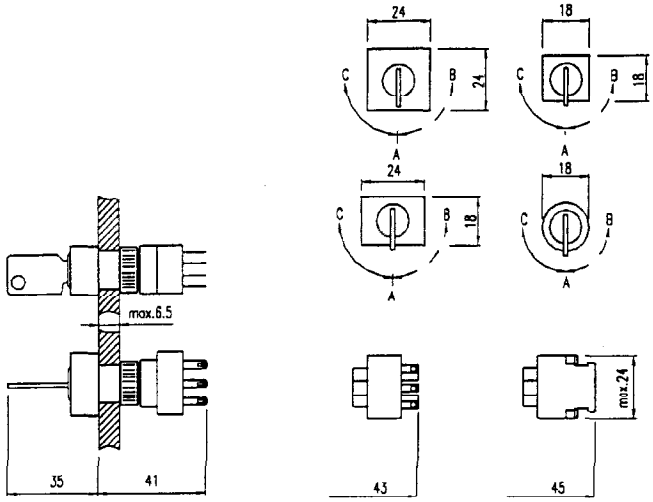


snap-action switching element with soldering-/plug-in terminal | slow-make switching element with soldering-/plug-in terminal | slow-make switching element with screw terminal

7 selector switch actuator 2 positions, selector switch actuator 3 positions
page 61.9, 61.10

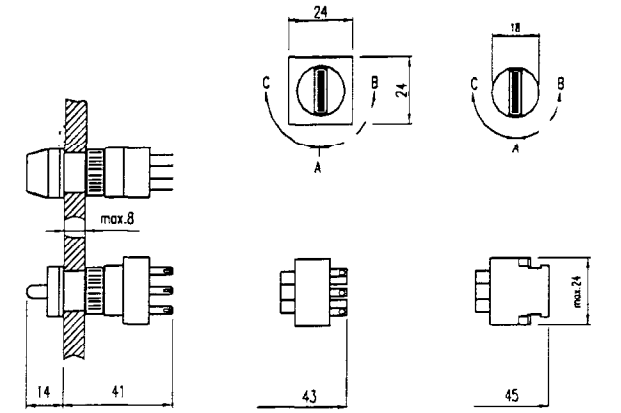


snap-action switching element with soldering-/plug-in terminal | slow-make switching element with soldering-/plug-in terminal | slow-make switching element with screw terminal

8 indicator complete for flush mounting
page 61.11

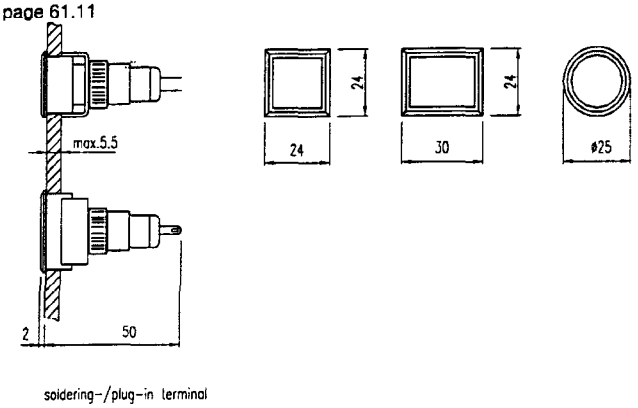


soldering-/plug-in terminal

16 protective cover
page 61.20

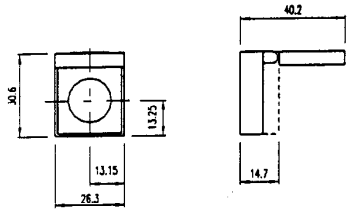


mounting dimensions

1 indicator complete, indicator-/flusher-actuator, illuminated-/pushbutton actuator, keylock switch actuator 2 positions, keylock switch actuator 3 positions, selector switch actuator 2 positions, selector switch actuator 3 positions, blind plug projecting
page 61.5, 61.6, 61.7, 61.8, 61.9, 61.10, 61.21

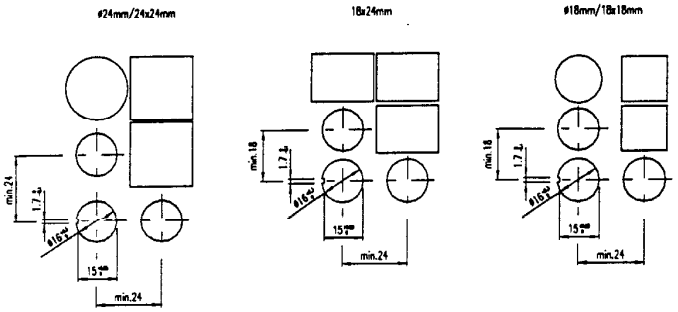

2 emergency stop switch actuator foolproof, pushbutton actuator with mushroom-head cap, pushbutton actuator for flush mounting
page 61.6, 61.7, 61.12



3 indicator complete for flush mounting, indicator-/flusher-actuator for flush mounting, illuminated-/pushbutton actuator for flush mounting, keylock switch actuator with 2 positions for flush mounting, keylock switch actuator 3 positions for flush mounting, selector switch actuator 2 positions for flush mounting, selector switch actuator 3 positions for flush mounting, blind plug flat
page 61.11, 61.12, 61.13, 61.14, 61.15, 61.16, 61.21

