Laserliner

InspectorCamera (7,9 mm; 1,5 m)

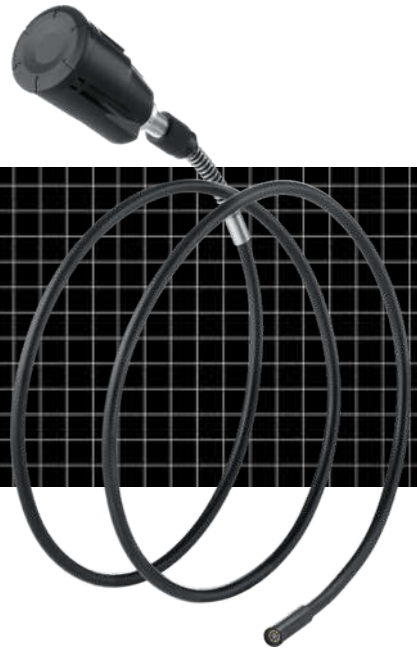

Camera unit for VideoInspector

This camera unit is suitable for use with the VideoInspector base unit and enables accurate localisation of problems behind or in objects, walls, pipes and cavities. The camera head and probe are waterproof and resistant to petrol and diesel. The 8 high-performance LEDs provide excellent object illumination.

- Camera unit for VideoInspector
- Effective problem localisation behind or in objects, walls, pipes, cavities
- Waterproof camera head and probe: also resistant to diesel, petrol, motor oil, AdBlue®, ethanol and sea water (salinity 28%)
- 8 high-performance LEDs on the camera for powerful object lighting

TECHNICAL DATA	
Diameter Camera Head	7.9 mm
Camera Resolution	1280 x 720 pixels
Field of View (FOV)	80°
Depth of Focus (DOF)	3 … 8 cm
Length of Probe	1.5 m
Dimensions (W x H x D)	1550 mm x 42 mm x 42 mm
Weight	200 g #









1280 x 720 pixel | LED LIGHT | IP 68

SCOPE OF DELIVERY



Item No. 092.233.1 GTIN (EAN) 4021563732548 SU 1

UMAREX GmbH & Co. KG • Laserliner • Gut Nierhof 2 • 59757 Arnsberg • Germany • Tel. +49 2932 9004-0 • info@laserliner.com • www.laserliner.com