


Test Jacks
2 mm System



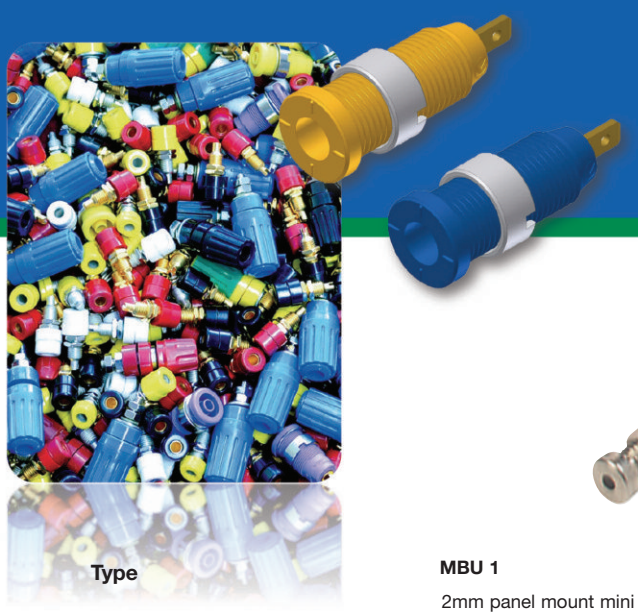



Type	MBU 1	MBU 2
	2mm panel mount mini test jack, nickel plated brass, spring loaded with solder terminal. max. installation wall thickness 8mm.	2mm mini metal test jack, tin plated brass, spring loaded with PCB soldering terminal. Fits MST3, MVL 2 and MST201.
Pin Diameter	2 mm	2 mm
PART NO. / Housing color	**930312000**	**931337000**

Technical Data		
Contact Type	spring-loaded jack Ø 2 mm	spring-loaded jack Ø 2 mm
Connection Type	solder terminal	solder terminal
Voltage Rating	30 VAC / 60 VDC	30 VAC / 60 VDC
Measurement Category (IEC61010)	CAT I	CAT I
Current Rating*	6 A	6 A
Contact Resistance	6 mOhm	6 mOhm
Mounting Type	screw thread M5	screw
Material Specifications		
Jack Body	nickel plated brass	tin plated brass
Contact Spring	tin plated copper-beryllium	gold plated copper-beryllium
Housing	–	–
Environmental Conditions		
Temperature Range	-20°C to +60 °C (-4 to 140°F)	-20°C to +60 °C (-4 to 140°F)
Flamability Rating		
Housing	–	–

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.





* Please consider derating graph on page 80.