HIRSCHMANN® Test & Measurement
A BRAND OF SKS

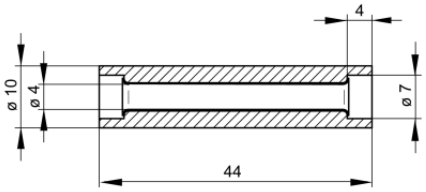
SKS Kontakttechnik GmbH

Sockets

KD 10



CE

Product	KD 10
description	Insulated coupling with a tin-plated brass tube for two 4 mm diameter plugs.
operating instruction	BA407
article-no. / *colour	9301091xx 00 black 01 red Ni
drawing	
	
technical data	
connection	unsprung socket 4 mm
rated voltage[1]	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O [3]
rated current[1] (consider derating curve)	10 A
material socket	brass, tin plated
housing material	PS
temperature range acc. To IEC61010[2]	-25 °C to +70 °C
standard	IEC 61010

4 mm system

[1] for normal environmental conditions -5°C to +40°C
[2] contact the manufacturer for applications at deviating temperature ranges
[3] without rated measurement category, for other circuits that are not directly connected to mains
stand: 29.10.2020