MURR ELEKTRONIK
stay connected

M8 male 0° A-cod. screw terminal


4-pol., 0,14 - 0.5mm², 2,5 - 5mm


Male straight
M8, 4-pole
Screw terminal
Connection cross section: 0.14...0.5 mm²


Link to Product

Illustration



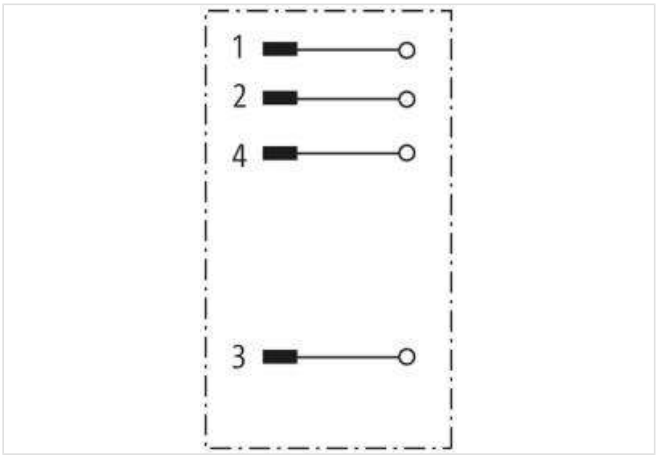

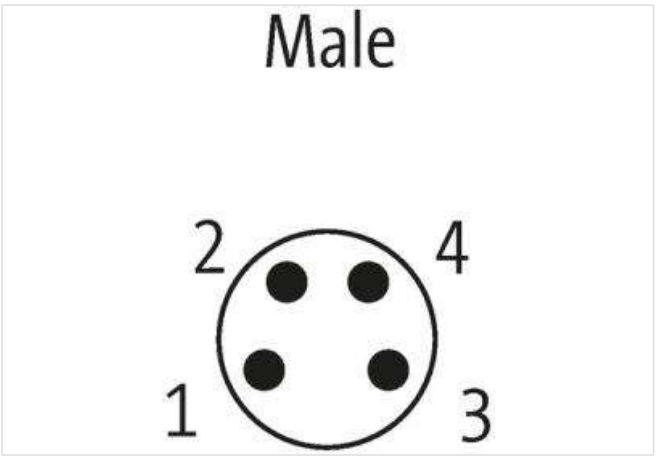

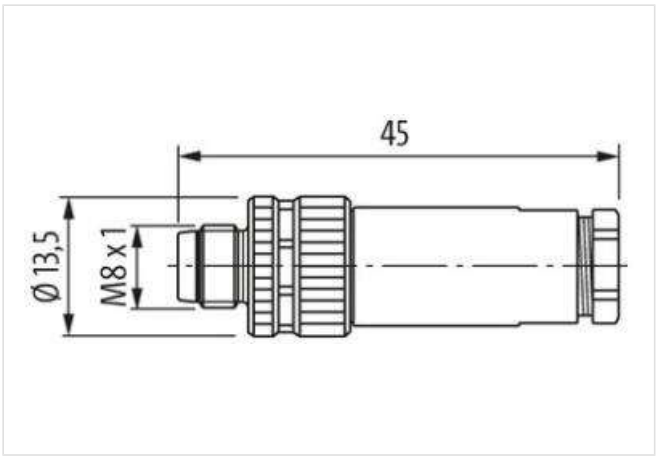

Product may differ from Image

Form

Form	08611

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating current per contact	max. 4 A
No. of poles	4-pole
Material group	III

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17

Coding	A-coded
Connection cross section	0.14...0.5 mm²
Sealing range (cable Ø)	2.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)
Compression gland	M8 (AF12,5)
Isolation resistance	> 100 MOhm
Over voltage category	II
General data	
Material contact	Brass, gold plated
Pollution Degree	3
Temperature range	-40...+85 °C
Material housing	PBT
Material contact carrier	PA66
Connection	Screw terminal
Dimensions H×W×D	45×13,5×13,5 mm
Product article number of manufacturer	7000-08611-0000000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2023-03-17