ATXR - PROTWIST® screwdrivers for Resistorx® screws

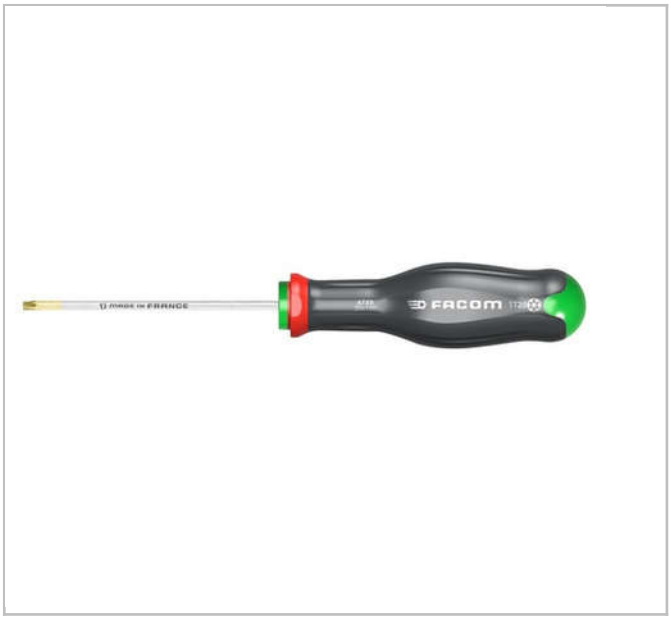

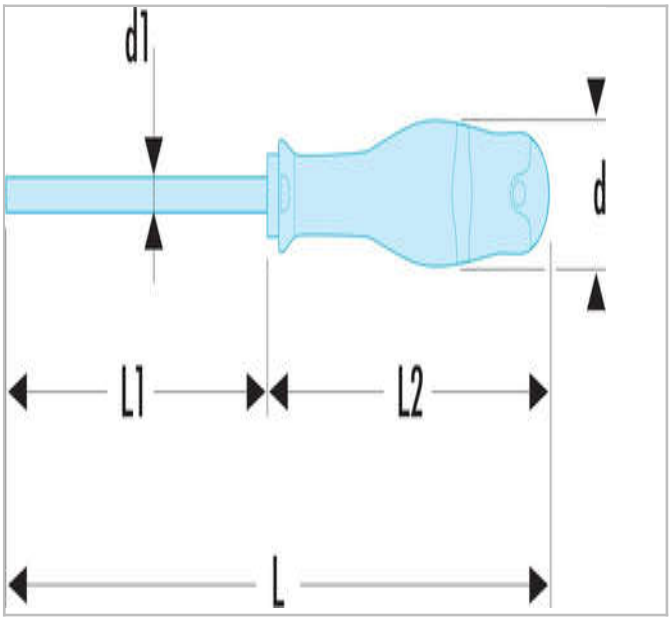

Description:

● Compliant with Resistorx® specifications.
● Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
● Handle Material - Softer for more Comfort and still Chemical Resistant.
● Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
● Handle ‘Channel’ - +10% Torque.
● Laser Marking - gives virtually Permanent Marking.
● CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

© FACOM 2020

	A [mm]	Diameter [mm]	Diameter D1 [mm]	Length L1 [mm]	Length L [mm]	Length L2 [mm]	Weight [g]
ATXR10X75	2,74	25.0	3.0	75.0	184	109	50
ATXR15X75	3,26	30.0	3.5	75.0	185	110	61
ATXR20X100	3,84	36.0	4.0	100.0	220	120	67
ATXR25X100	4,4	36.0	5.0	100.0	220	120	113
ATXR27X100	4,96	36.0	5.5	100.0	220	120	113
ATXR30X125	5,49	36.0	6.0	125.0	245	120	126
ATXR40X150	6,6	40.0	7.0	150.0	275	125	173

© FACOM 2020