COMUS Group

COMUS International


Tilt Switch - Non Mercury contacts
Part Number : S1234
Product Data Sheet

PICTURE



✔RoHS Compliant

DIMENSIONS

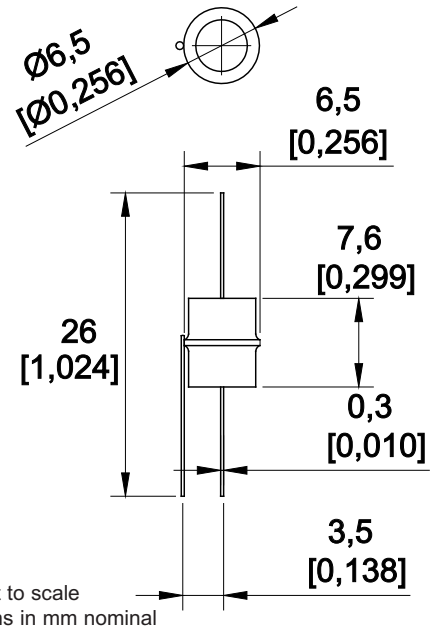

Drawings not to scale
All dimensions in mm nominal

SPECIFICATION

Contact Form / Style		Change-over break before make
Switching Voltage	Max Volts AC	60
Switching Current	Max Amps	0.2
Switching Capacity	Max VA	3
Contact Resistance	Max Ohms	10
Differential Angle	Max degrees	35
Operating Temperature	Celsius	-37° - 100°
Storage Temperature	Celsius	-40° - 125°
Case Material		Steel Gold plated

Applications Include

- Low power tilt safety.
- Consumer tilt applications .
- Alarm system switch.
- Tilt light control.

Features/Options

- Hermetically sealed.
- Inert gas filled

Rev. No.	Revision Note	Date	Signature
2	Datasheet redesign	05-03-12	ML

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : (1)973 777 6900 **www.comus-intl.com** **Fax: (1)973 777 8405**

Belgium: +32 (0) 12 390400 - Assemtech,UK: +44 (0) 1255 862236 - Germany:+49 (0)911 923 15 943

© 2012 Copyright Comus International, 454 Allwood Road, Clifton NJ 07012, USA