44S.SLS - Metric open end wrenches



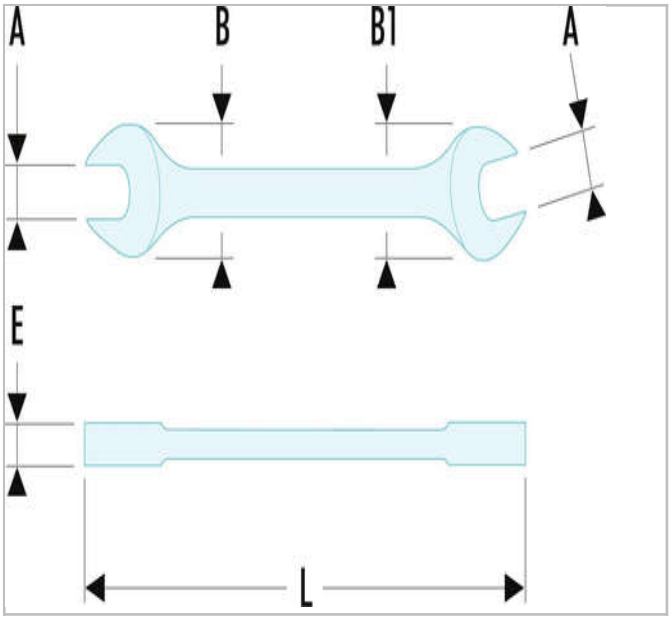

Standards:

NF ISO 10102, NF ISO 3318, NF ISO 1711-1, NF ISO 691, ISO 10102, ISO 3318, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691, DIN 3110

Description:

● Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
● The crimped "sliding" cable solution, selected and tested by FACOM, maintains user ergonomics (8 - 30 mm wrenches).The open ends are slimmer than a standard combination wrench for better accessibility. Examples: brake calipers, hydraulic hose locknuts.Heads hinged at 15°.
● Metric sizes: 6 to 41 mm.
● Presentation: satin chrome finish.

© FACOM 2020

	A [mm]	Length L [mm]	Thickness E [mm]	Head Width B [mm]	Head Width B1 [mm]	Weight [Kg]
44.10X11SLS	10x11	152.0	4.9	23.0	25	0,075
44.12X13SLS	12x13	167.0	5.5	25.5	29	0,09
44.14X15SLS	14x15	182.0	5.7	31.0	33,5	0,115
44.16X17SLS	16x17	210.0	6.3	37.0	42	0,155
44.18X19SLS	18x19	220.0	7.3	39.0	42	0,185
44.21X23SLS	21x23	245.0	8.3	47.0	52	0,25
44.22X24SLS	22x24	245.0	8.3	47.0	52	0,25
44.24X27SLS	24x27	270.0	8.8	51.0	58	0,35
44.30X32SLS	30x32	318.0	9.8	63.0	70	0,54
44.34X36SLS	34x36	342.0	11.7	71.0	75	0,745
44.36X41SLS	36x41	381.0	12.3	78.0	87	0,97
44.6X7SLS	6x7	120.0	3.7	15.0	17,5	0,045
44.8X9SLS	8x9	137.0	4.2	18.5	21	0,055

© FACOM 2020